


1153-SS Heavy Duty 2" Wide General Purposes
Stainless Steel Caster Series

VMRC Wheel Diameter x Wheel Width 150 x 40mm

EAN

TW-4111606001008

Rigid Casters, Welded Caster Fork. Surface vibration, Mounting Type - Top Plate device. Plastic Wheel Center, High-Quality Resilient Rubber Wheel Tread. White, Bearing—Ball Bearings.

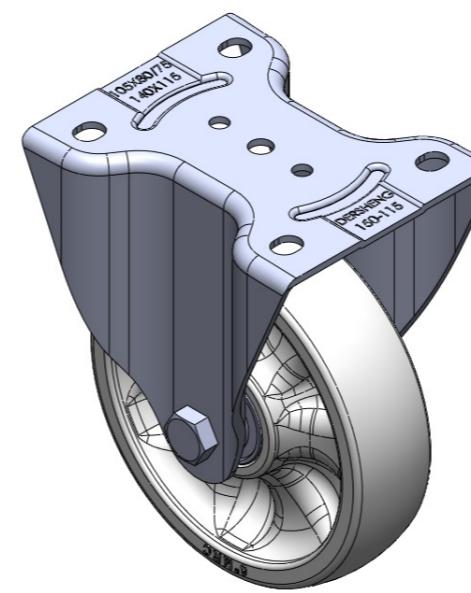

Wheel surface: thermoplastic
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter 150mm

Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 115mm

Bolt Hole Spacing 105 x 77.5mm

Plate Hole 13.5 x 11mm

Overall Height 190mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 350kgs

Load Capacity (Static) 525kgs

Temperature -20°C to +80°C

Fork Type Rigid Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A


Weight 1.20kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • ○ ○ ○
Floor Surface Preservation	• • ○ ○ ○

Dimensions

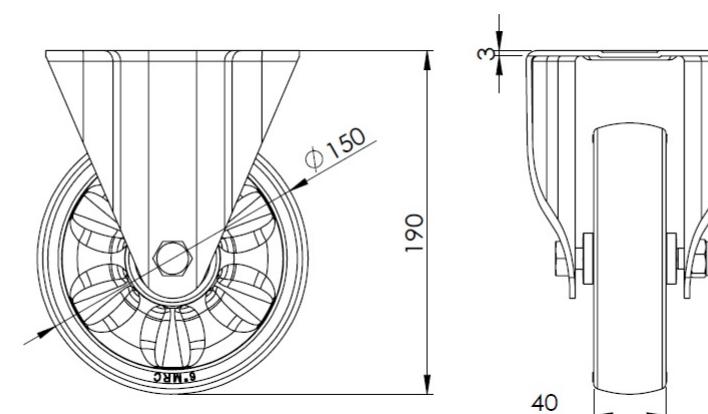

Mounting

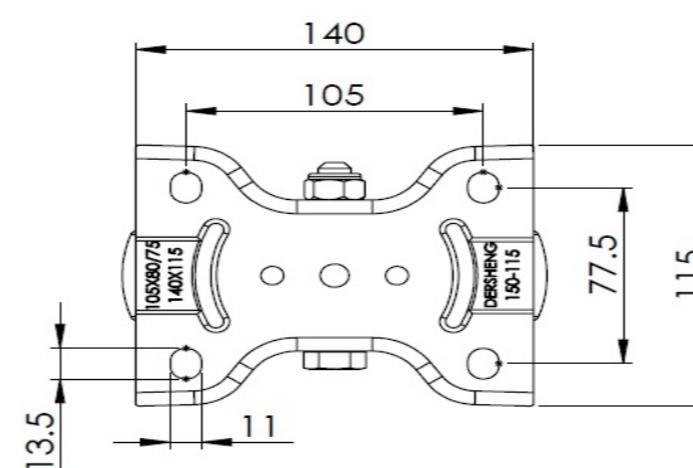

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com