


1116-SS-B Type B Stainless Steel Series

VMRC Wheel Diameter x Wheel Width 150 x 40mm

EAN

TW-4111606001013

Rigid Casters, Welded Caster Fork. Surface vibration, Mounting Type - Top Plate device. Reinforced Polypropylene Wheel Center and Wheel Tread (Zinc-Plated iron bearings). White, Bearing—Ball Bearings.

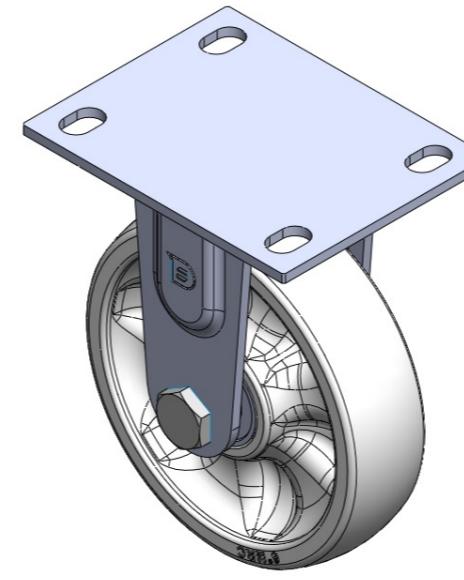

Wheel surface: thermoplastic
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


Imperial Metric

Wheel Diameter	6 "
Wheel Width	1-5/8 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	5-9/16 " x 4-3/8 "
Bolt Hole Spacing	4-5/16 " x3"
Plate Hole	13/16 " x 9/16 "
Overall Height	7-3/8 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	882lbs
Load Capacity (Static)	1323lbs
Temperature	-4°F to +176°F
Fork Type	Rigid Caster
Stainless	Y
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	3.7lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

Dimensions

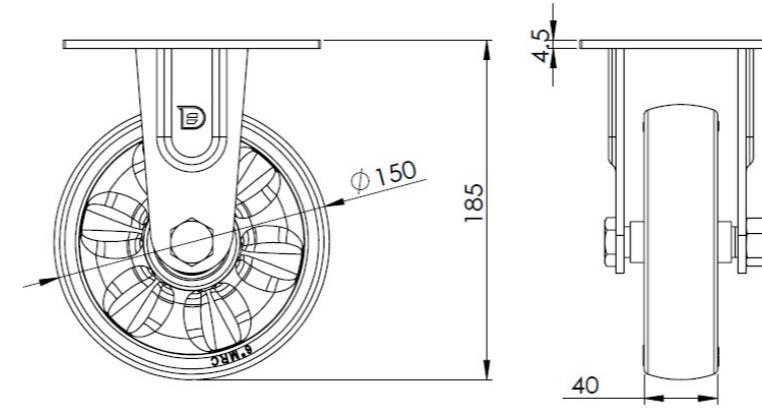

Mounting

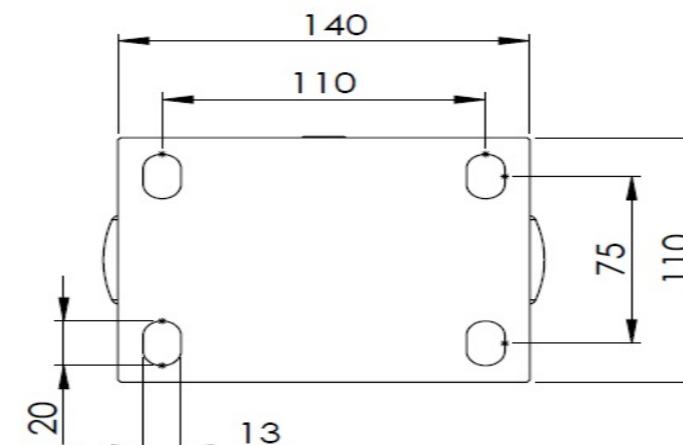

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com