


1116-SS-B Type B Stainless Steel Series

PU wheel (red) Wheel diameter x wheel width 150 x 42mm

EAN

TW-4111606001015

Rigid Casters, Welded Caster Fork. Surface vibration, Mounting Type - Top Plate device. Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread. Red, Bearing -Ball Bearings.

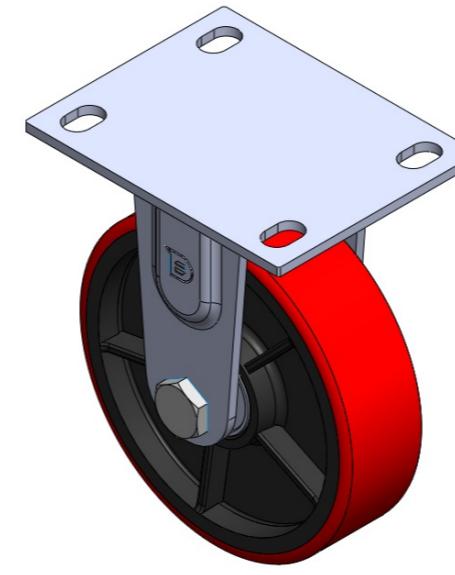

Wheel surface: High-quality polyurethane
Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter 6 "

Wheel Width 1-11/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 5-9/16 " x 4-3/8 "

Bolt Hole Spacing 4-5/16 " x3"

Plate Hole 13/16 " x 9/16 "

Overall Height 7-3/8 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 904lbs

Load Capacity (Static) 1334lbs

Temperature -4°F to +158°F

Fork Type Rigid Caster

Stainless Y

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.4lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ○ ○


Operating Noise ● ● ● ● ○

Floor Surface Preservation ● ● ● ● ○

Dimensions

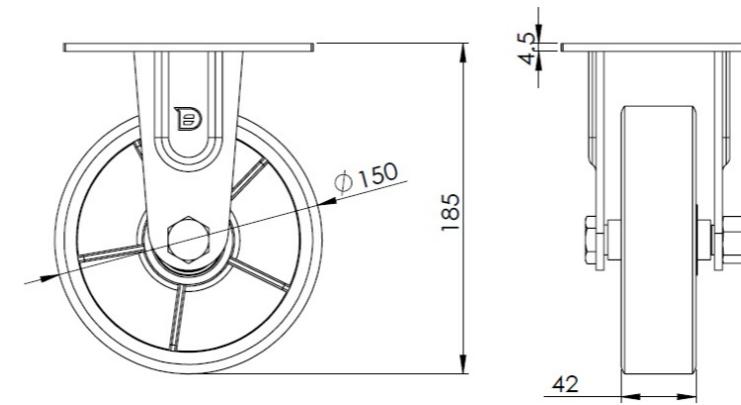

Mounting

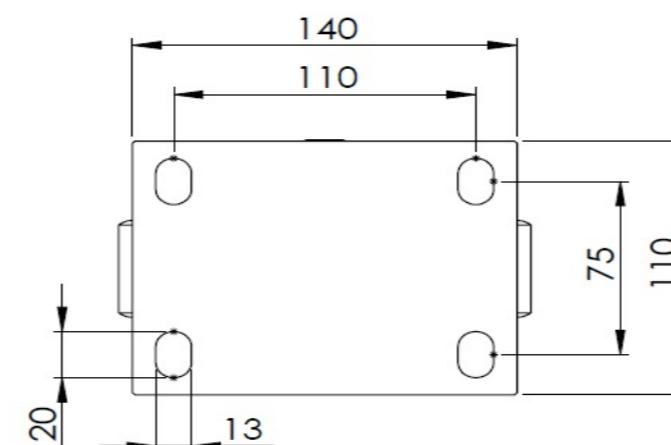

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com