



1129 Medical Caster Series


PPR Wheel Diameter × Wheel Width 75 x 31mm

EAN  
TW-4112903002003

Sliding Caster, Top Plate with Riveted Stamping Fork and 72 x 53.5 mm (2-7/8" x 2-1/8")  
Bolt Hole Spacing  
Zine-Plated, Mounting Type - Top Plate  
High-Quality Impact-Resistant Polypropylene Wheel Center with High-Quality Reinforced  
Polypropylene Rubber (TPR) Wheel Tread  
Dark gray, Bearing with Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

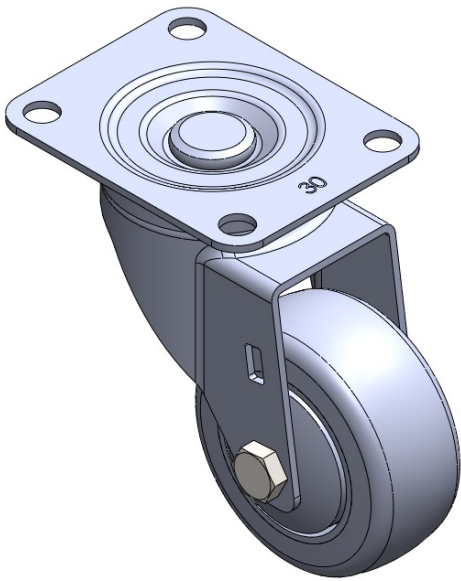

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 3 "                       |
| Wheel Width                                                            | 1-1/4 "                   |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 3-5/8 " x 2-7/8 "         |
| Bolt Hole Spacing                                                      | 2-7/8 " x 2-1/8 "         |
| Plate Hole                                                             | 25/64 "                   |
| Offset                                                                 | 2-3/16 "                  |
| Swivel Interference                                                    | 6-3/8 "                   |
| Overall Height                                                         | 4-1/2 "                   |
| Swivel Radius                                                          | 3-3/16 "                  |
| Hardness Of Tread                                                      | 82±5° Shore A             |
| Load Capacity (Dynamic)                                                | 154lbs                    |
| Load Capacity (Static)                                                 | 231lbs                    |
| Temperature                                                            | -4°F to +140°F            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 1.3lbs                    |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

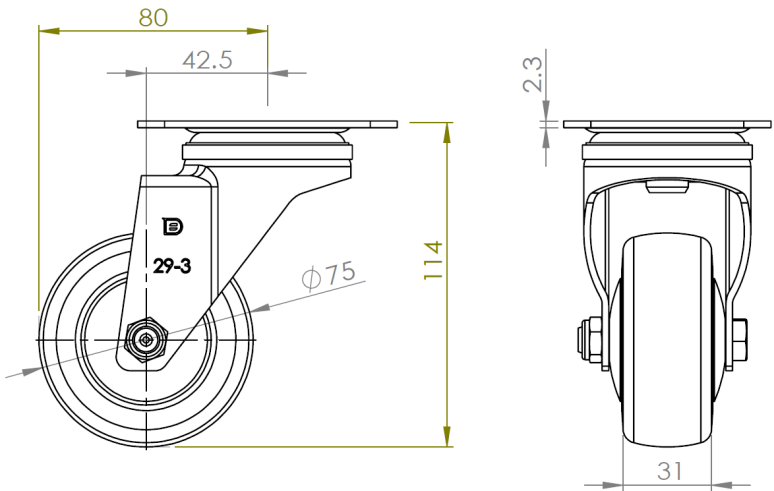

Mounting

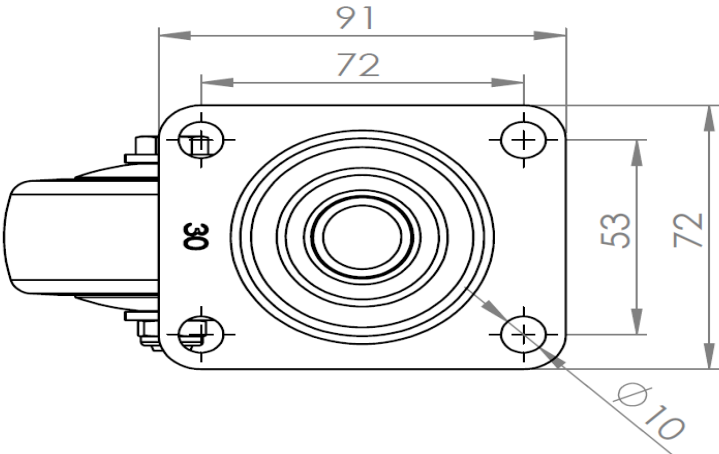

\* For any deviation between metric and imperial spec, please refer to the metric spec.