1129 Medical Caster Series

Dersheng Casters Keep Rolling

Resolute Wheel Diameter × Wheel Width 75 x 31mm

EAN

TW-4112903002007

Swivel Caster with Riveted Fork and Stamping Fork—75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing

Zine-Plated, Mounting Type - Top Plate
High-Quality Impact-Resistant Polypropylene core with High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

3 " Wheel Diameter 1-1/4 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

3-7/8 " x 2-3/4 " Plate Size 3" x 1-13/16" **Bolt Hole Spacing** 9/16 " x 23/64 " Plate Hole 1-11/16 " Offset Swivel Interference 6-3/8 " 4-1/2 " Overall Height 3-3/16 " Swivel Radius Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 198lbs Load Capacity (Static) 298lbs Temperature -4°F to +140°F **Swivel Caster** Fork Type

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.3lbs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

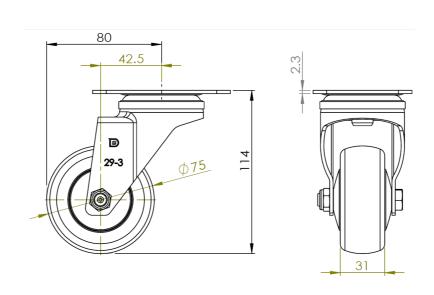

Mounting

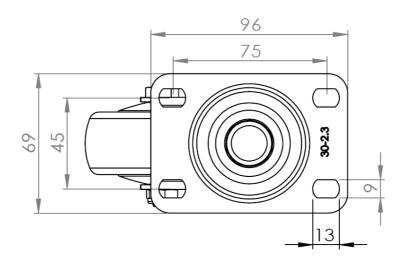

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.