1129 Medical Caster Series

PPR Wheel Diameter × Wheel Width 75 x 31mm

EAN

TW-4112903002025

Swivel Caster with Riveted Fork and Stamping Fork - round hole Zine-Plated, Top Plate (4T) Mounting Type system High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing - Ball Bearing.

4-3/8 " x 3-11/16 "

ISO22883

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Plate Size

Standard

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Bolt Hole Spacing 3-7/16 " x 2-13/16 "

Plate Hole 25/64 "

Offset 1-11/16 "
Swivel Interference 6-3/8 "

Swivel Interference 6-3/8 "

Overall Height 4-1/2 "

Swivel Radius 3-3/16 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 154lbs

Load Capacity (Static) 231lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A


Weight 1.8lbs

Advantages at a glance


Rolling Resistance

Floor Surface Preservation • • • • •

Dimensions

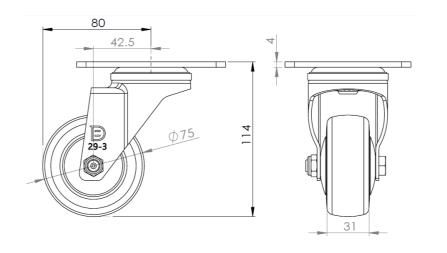

Mounting

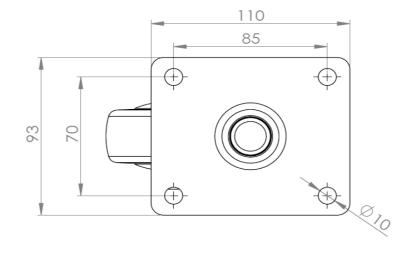

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.