1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (red) Wheel Diameter × Wheel Width 75 x 31mm

EAN

TW-4112903004010

Casters with a Total Brake and With locking system. Premium Fork with Riveted Fork. Zine-Plated, Top Plate (3T) Mounting Type mechanism. High-Quality Impact-Resistant Polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread. Red color. Bearings: Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 96 x 69mm **Bolt Hole Spacing** 75 x 45mm Plate Hole 13 x 9mm Offset 42.5mm Swivel Interference 208mm Overall Height 114mm **Swivel Radius** 104mm Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 70kgs

Load Capacity (Static) 105kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.65kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

. . . .


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

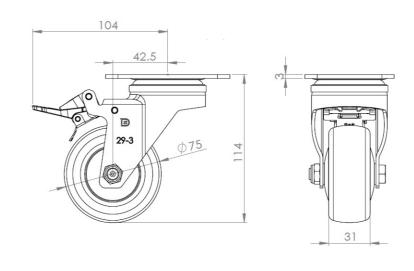

Mounting

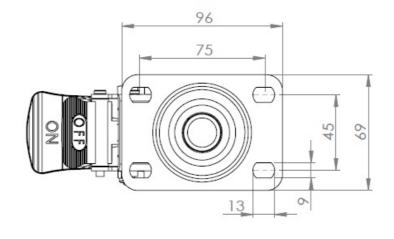

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.