1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (red) Wheel Diameter × Wheel Width 75 x 31mm

EAN


TW-4112903004012

Casters with Total Brakes and a With locking system. Top Plate Riveted and Stamping - instrument Fork. Hole Zine-Plated, Mounting Type - Top Plate. High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread. Red color, Bearing - Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 91 x 72.6mm **Bolt Hole Spacing** 72 x 53mm Plate Hole 10mm Offset 42.5mm Swivel Interference 210mm Overall Height 114mm **Swivel Radius** 105mm Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 70kgs

Load Capacity (Static) 105kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.65kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation

Dimensions

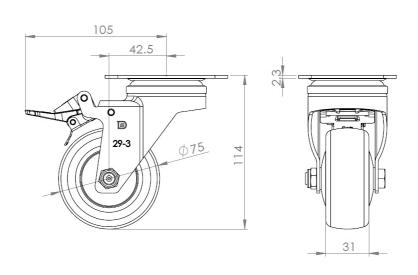

Mounting

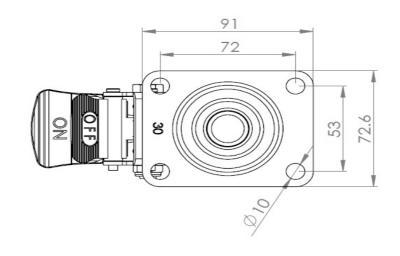

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.