



1129 Medical Caster Series


W Resolute Wheel Diameter × Wheel Width 75 x 31mm

EAN  
TW-4112903004021

Casters with Side Brakes and With locking system. Top Plate Riveted and Stamping - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing. Zine-Plated, Top Plate (3T) Mounting Type system. Reinforced, impact-resistant polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread. Dark gray, Bearing - Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

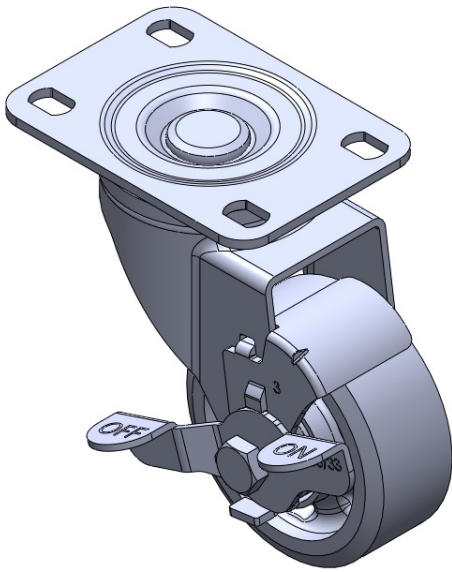

Picture may differ from original product


Technical Data

|                                                                        |                               |
|------------------------------------------------------------------------|-------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                               |
| Wheel Diameter                                                         | 3 "                           |
| Wheel Width                                                            | 1-1/4 "                       |
| Wheel Bearing                                                          | Wheels With Ball Bearings     |
| Plate Size                                                             | 3-7/8 " x 2-3/4 "             |
| Bolt Hole Spacing                                                      | 3 " x 1-13/16 "               |
| Plate Hole                                                             | 9/16 " x 23/64 "              |
| Offset                                                                 | 2-3/16 "                      |
| Swivel Interference                                                    | 6-1/2 "                       |
| Overall Height                                                         | 4-1/2 "                       |
| Swivel Radius                                                          | 3-1/4 "                       |
| Hardness Of Tread                                                      | 72±5° Shore A                 |
| Load Capacity (Dynamic)                                                | 198lbs                        |
| Load Capacity (Static)                                                 | 298lbs                        |
| Temperature                                                            | -4°F to +140°F                |
| Fork Type                                                              | Swivel Caster With Side Brake |
| Stainless                                                              | N/A                           |
| Electrical Conductivity                                                | N/A                           |
| Anti-Static                                                            | N/A                           |
| Weight                                                                 | 1lbs                          |
| Standard                                                               | ISO22883                      |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

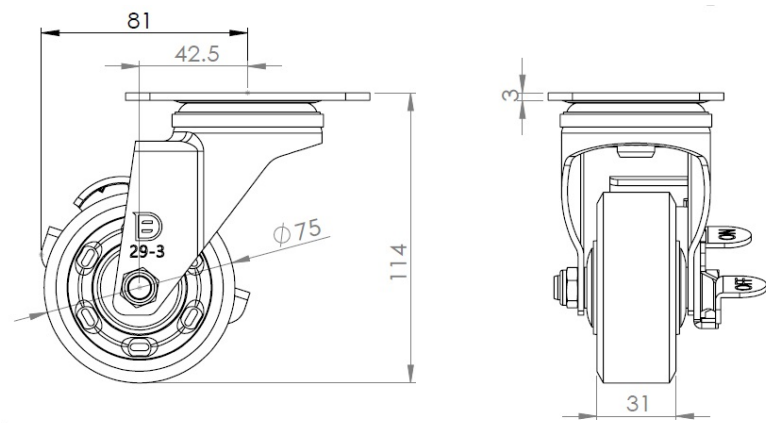

Mounting

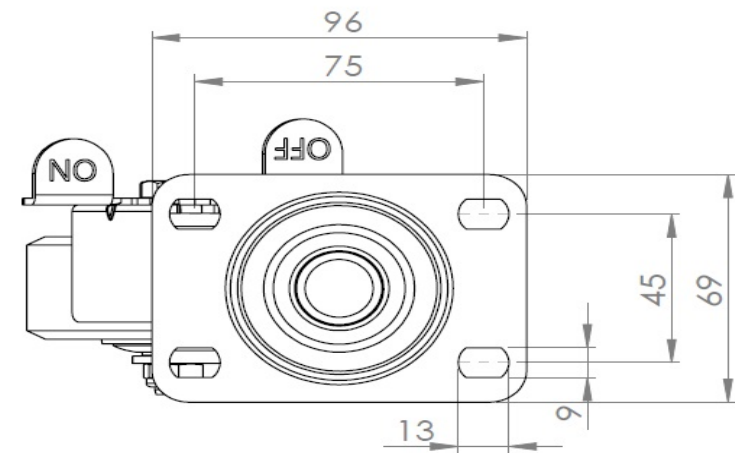

\* For any deviation between metric and imperial spec, please refer to the metric spec.