# 1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (red) Wheel Diameter × Wheel Width 75 x 31mm

EAN

TW-4112903004034


Casters with Total Brakes and With locking system. Threaded Stem Riveted Pressed Fork —5/8-11.

Zine-Plated, Mounting Type - Threaded Stem mechanism. High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Red color, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### **Technical Data**

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 5/8 " -11牙
Threaded Size 32mm
Offset 42.5mm
Swivel Interference 210mm
Overall Height 116mm
Swivel Radius 105mm
Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 70kgs

Load Capacity (Static) 105kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.60kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

### **Dimensions**

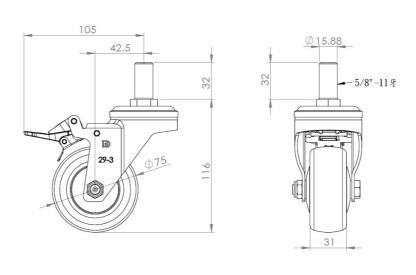

## Mounting

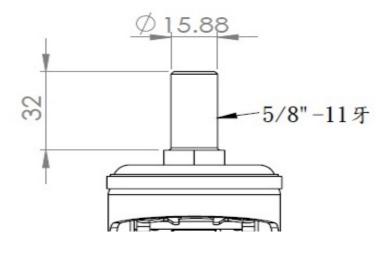

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.