1129 Medical Caster Series

Dersheng Casters Keep Rolling

W Resolute Wheel Diameter × Wheel Width 75 x 31mm


EAN

TW-4112903004055

Casters with Side Brakes and With locking system. Top Plate with Riveted, Stamping, round hole. Electroplated finish, Top Plate (4T) Mounting Type system. Reinforced, impact-resistant polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread. Dark gray, Bearing with Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 110 x 93mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 10mm

Offset 43mm

Swivel Interference 162mm

Overall Height 114mm

Swivel Radius 81mm

Hardness Of Tread 72±5A° Shore A

Load Capacity (Dynamic) 90kgs
Load Capacity (Static) 135kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.86kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • •


Operating Noise • • • • •

Floor Surface Preservation • • • • •

Dimensions

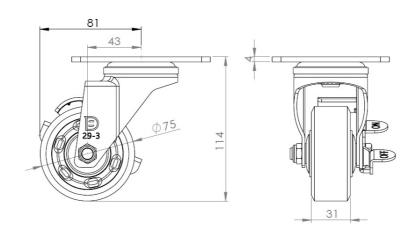

Mounting

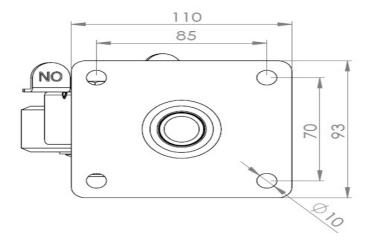

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.