



1129 Medical Caster Series


W Resolute Wheel Diameter × Wheel Width 75 x 31mm

EAN
TW-4112903004055

Casters with Side Brakes and With locking system. Top Plate with Riveted, Stamping, round hole. Electroplated finish, Top Plate (4T) Mounting Type system. Reinforced, impact-resistant polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread. Dark gray, Bearing with Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

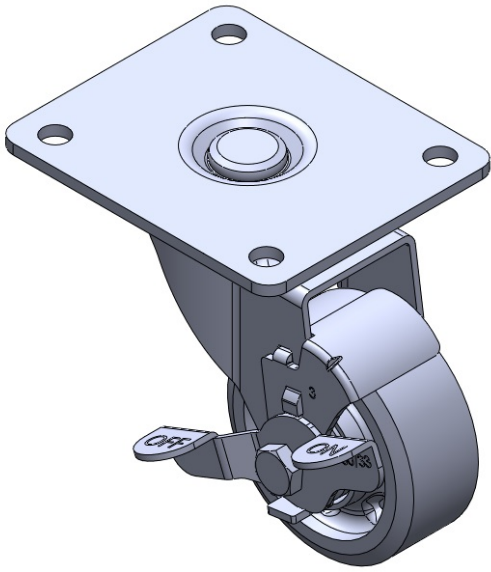

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	3 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	4-3/8 " x 3-11/16 "
Bolt Hole Spacing	3-7/16 " x 2-13/16 "
Plate Hole	25/64 "
Offset	1-7/8 "
Swivel Interference	6-1/2 "
Overall Height	4-1/2 "
Swivel Radius	3-1/4 "
Hardness Of Tread	72±5A° Shore A
Load Capacity (Dynamic)	198lbs
Load Capacity (Static)	298lbs
Temperature	-4°F to +140°F
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

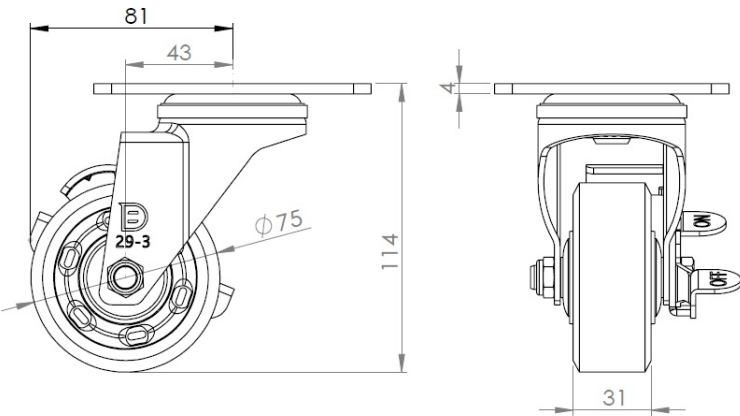

Mounting

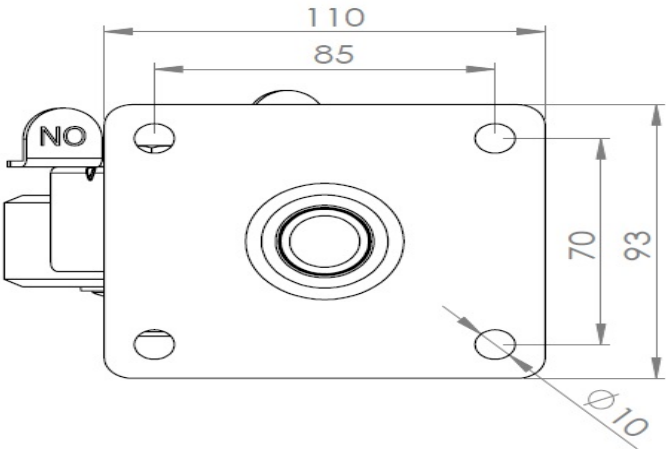

* For any deviation between metric and imperial spec, please refer to the metric spec.