1129 Medical Caster Series

Dersheng Casters Keep Rolling

W Resolute Wheel Diameter × Wheel Width 75 x 31mm


EAN

TW-4112903004063

Casters with Side Brakes and With locking system. Stamping, Riveted Fork – \emptyset 11x38L Electroplated finish, Mounting Type - Cylindrical Stem, brass buckle included Reinforced, impact-resistant polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Diameter 11mm

Stem Hole Spec 38mm

Offset 42.5mm

Swivel Interference 162mm

Overall Height 110mm

Swivel Radius 81mm

Hardness Of Tread 72±5A° Shore A

Load Capacity (Dynamic) 90kgs
Load Capacity (Static) 135kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.60kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


.

Floor Surface Preservation • • • • •

Dimensions

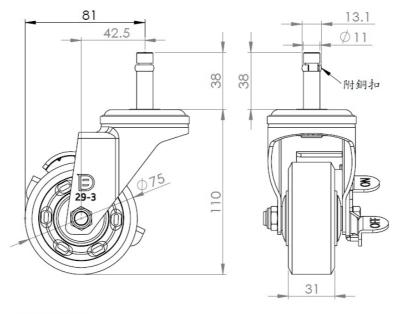

Mounting

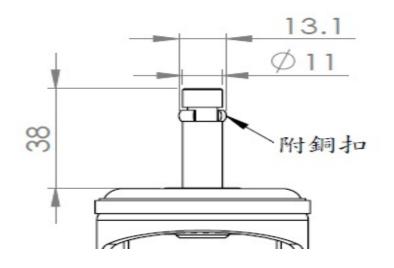

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.