1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR Wheel Diameter × Wheel Width 75 x 31mm

EAN

TW-4112903004094


Casters with a Total Brake and With locking system. Threaded Stem, Riveted, Stamping Fork—1/2"-12" UNCs

Electroplated finish, Mounting Type - Threaded Stem High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR) Wheel Center: high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

3 " Wheel Diameter

Wheel Bearing Wheels With Ball Bearings

1-1/4 "

Threaded Stem

Wheel Width

Offset 2-3/16 " 8-3/8 " Swivel Interference 4-1/2 " Overall Height **Swivel Radius** 4-3/16 " Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 154lbs 231lbs Load Capacity (Static)

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.3lbs ISO22883 Standard


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

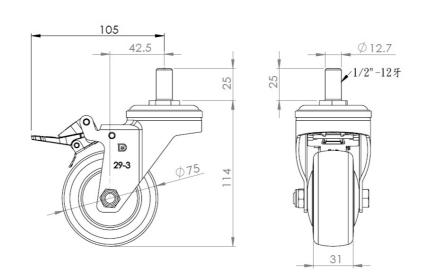

Mounting

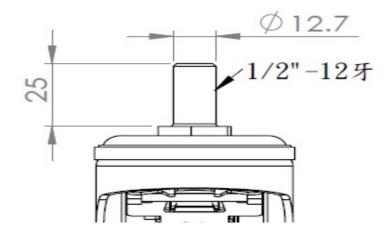

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.