

## 1129 Medical Caster Series

PPR Wheel Diameter x Wheel Width 100 x 31mm

EAN


TW-4112904001002

Rigid Caster with Stamping Fabricated Caster Fork 72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing.  
 Zinc-Plated, Mounting Type - Top Plate.  
 High-Quality Impact-Resistant Polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.  
 Dark gray, Plain Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

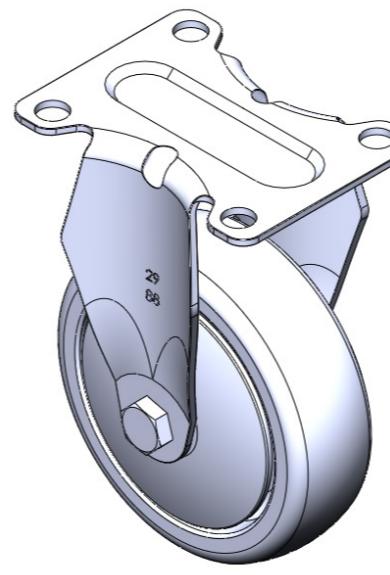

Picture may differ from original product

## Technical Data

 Metric  Imperial

Wheel Diameter 100mm

Wheel Width 31mm

Wheel Bearing Wheel With Plain Bearing

Plate Size 92 x 70mm

Bolt Hole Spacing 72 x 53mm

Plate Hole 10mm

Overall Height 136mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 80kgs

Load Capacity (Static) 120kgs

Temperature -20°C to +60°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.45kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • • ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

## Dimensions

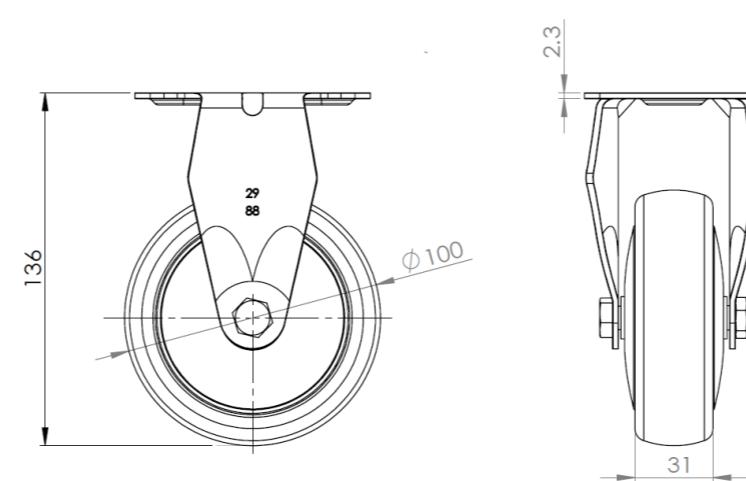

## Mounting

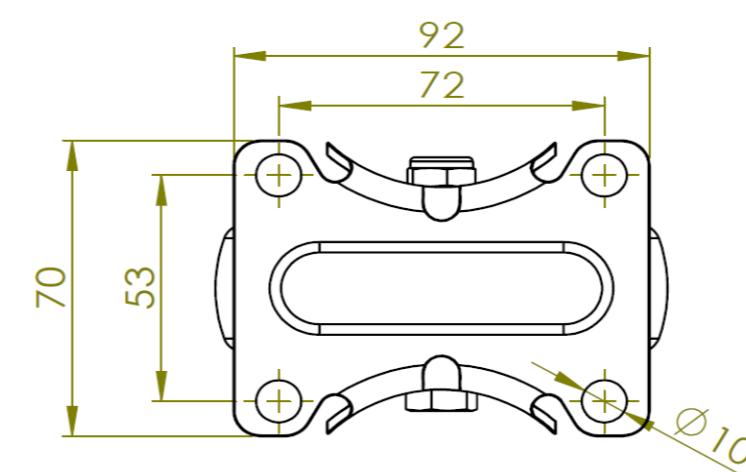

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com