


1129 Medical Caster Series

W Resolute Wheel Diameter x Wheel Width 100 x 31mm

EAN

TW-4112904001011

Rigid Caster with integrally molded Stamping footrest and 72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing. Zinc-Plated, Mounting Type - Top Plate. Reinforced, impact-resistant polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread. Dark gray, Ball Bearings.

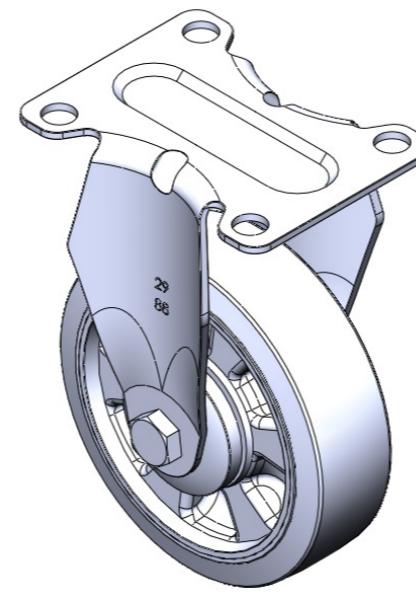

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 100mm

Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 92 x 70mm

Bolt Hole Spacing 72 x 53mm

Plate Hole 10mm

Overall Height 136mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 125kgs

Load Capacity (Static) 187.5kgs

Temperature -20°C to +60°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.45kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • •

Floor Surface Preservation • • • •

Dimensions

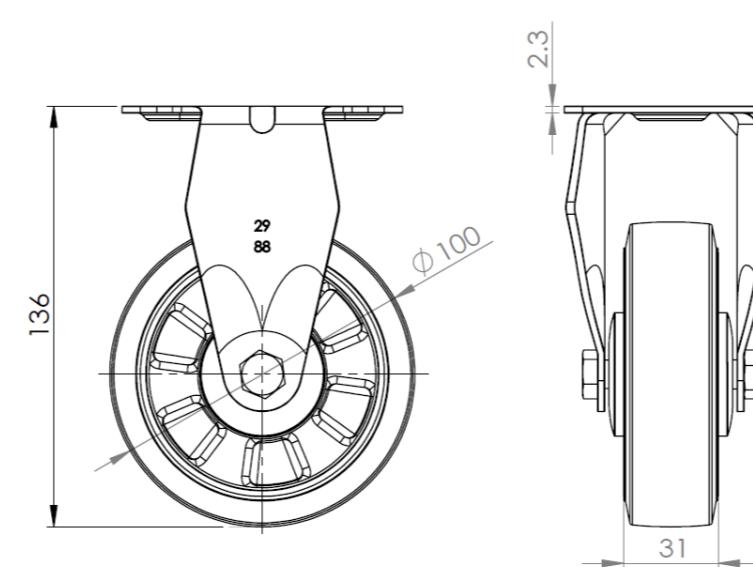

Mounting

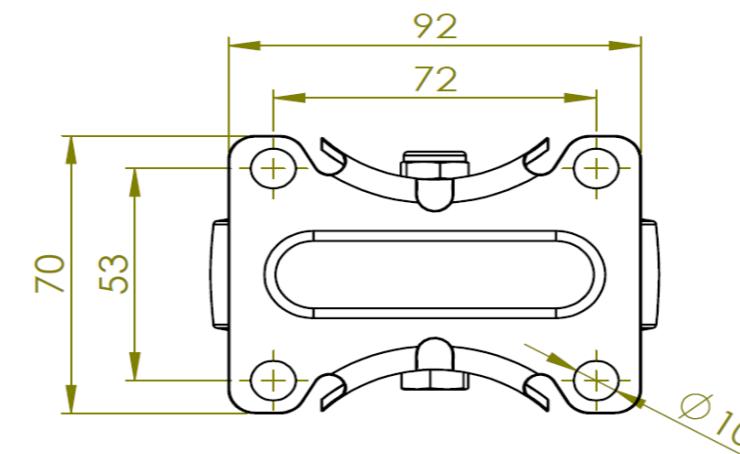

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com