1129 Medical Caster Series

Dersheng Casters Keep Rolling

WMRC Wheel Diameter × Wheel Width 75 x 31mm


EAN

TW-4112904001022

Rigid Caster with Stamping Fabricated Caster Fork 72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate. Reinforced thermoplastic plastic Wheel Center and Wheel Tread. Bearings: Ball Bearings.

Wheel surface: Thermoplastic plastic (PA6) Wheel Center: Thermoplastic plastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 31mm

Wheel With Plain Bearing Wheel Bearing

Plate Size 92 x 70mm **Bolt Hole Spacing** 72 x 53mm Plate Hole 10mm Overall Height 136mm Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 130kgs Load Capacity (Static) 195kgs Temperature -20°C to +80°C Fork Type Rigid Caster Stainless N/A

Electrical Conductivity N/A N/A Anti-Static Weight 0.45kgs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • • •

Dimensions

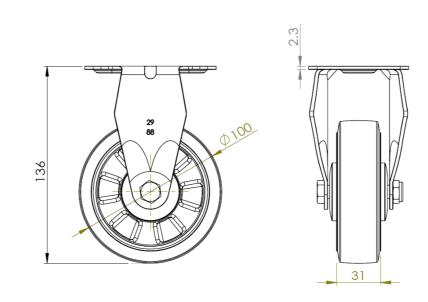

Mounting

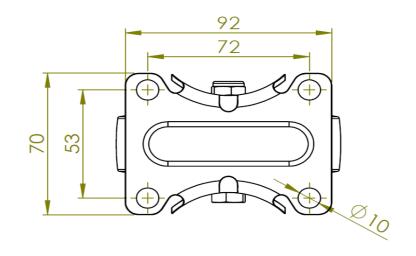

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.