# 1129 Medical Caster Series

Dersheng Casters Keep Rolling

Nylon Wheel Diameter × Wheel Width 100 x 32mm

EAN

TW-4112904002049


Swivel Caster, Top Plate Riveted and Stamping with 72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing.

Zine-Plated, Mounting Type - Top Plate.
Reinforced Polypropylene and Wheel Tread.

Bearing - Plain Bearing.

Wheel surface: Thermoplastic plastic (PA6) Wheel Center: Thermoplastic plastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

#### ● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 32mm

Wheel With Plain Bearing Wheel Bearing

Plate Size 91 x 72.6mm **Bolt Hole Spacing** 72 x 53mm Plate Hole 10mm Offset 40mm Swivel Interference 180mm Overall Height 139mm **Swivel Radius** 90mm Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 120kgs Load Capacity (Static) 180kgs


Temperature -20°C to +80°C Fork Type **Swivel Caster** 

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.65kgs Standard ISO22883


### Advantages at a glance

Rolling Resistance Operating Noise Floor Surface Preservation • • • • • •

### **Dimensions**

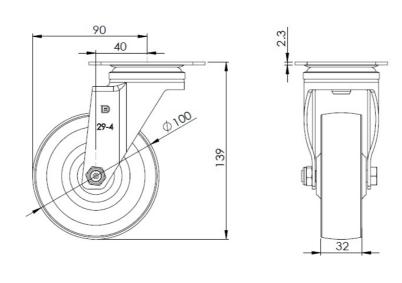

## Mounting

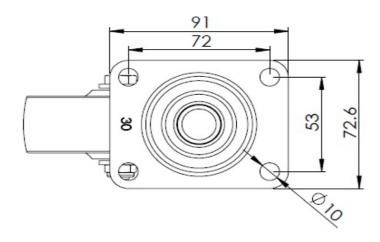

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.