

## 1129 Medical Caster Series

AQPU (grey) wheel Diameter x Wheel Width 100 x 31mm


EAN

TW-4112904002056

Swivel Caster, Top Plate Riveted with Stamping Fork and 72 x 53.5 mm (2-7/8" x 2-1/8")  
 Bolt Hole Spacing  
 Zinc-Plated, Mounting Type - Top Plate  
 Aluminum wheel center with High Quality Polyurethane Wheel Tread  
 Gray, Bearing—Ball Bearings.

Wheel tread: high quality polyurethane  
 Wheel Center: aluminum core

Drawings are for reference only and may differ from the product

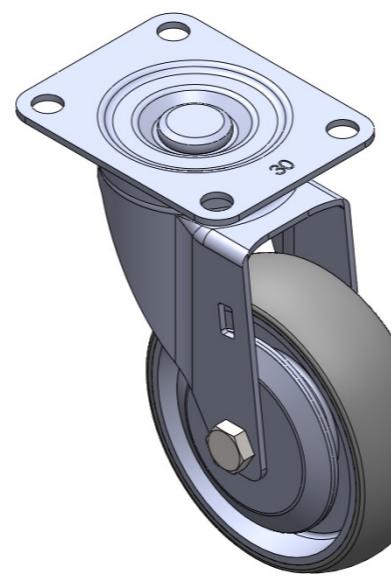

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	100mm
Wheel Width	31mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	91 x 72.6mm
Bolt Hole Spacing	72 x 53mm
Plate Hole	10mm
Offset	40mm
Swivel Interference	180mm
Overall Height	139mm
Swivel Radius	90mm
Hardness Of Tread	77±5° Shore A
Load Capacity (Dynamic)	200kgs
Load Capacity (Static)	300kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.65kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

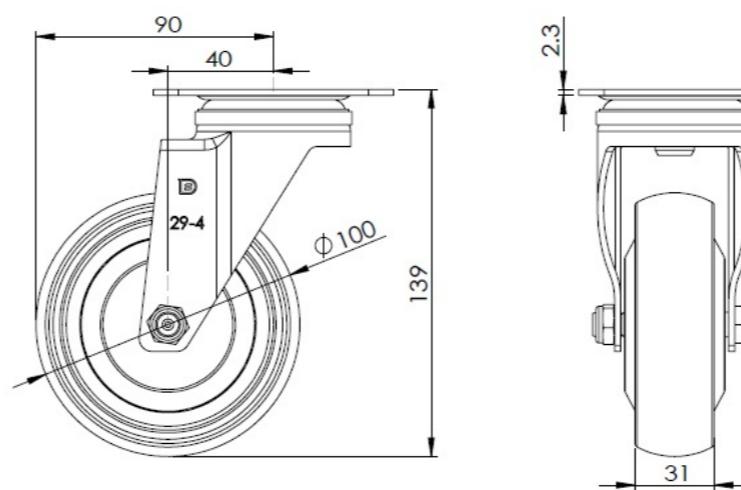

## Mounting

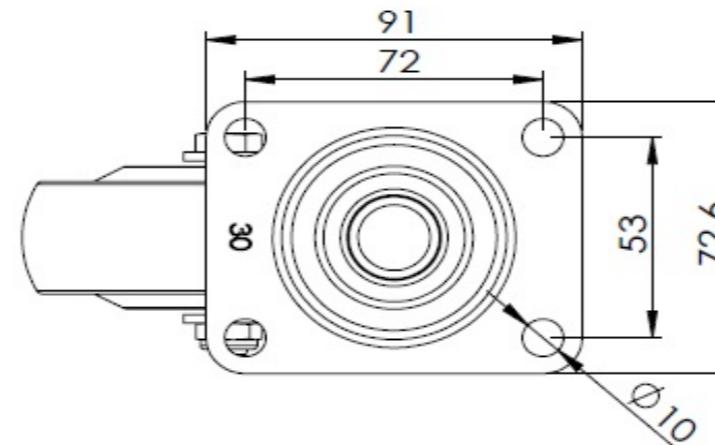

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com