



1129 Medical Caster Series


W Resolute Wheel Diameter × Wheel Width 100 x 31mm

EAN  
TW-4112904004021

Casters with Side Brakes and With locking system.  
Top Plate Riveted and Fork – 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing  
Zine-Plated, Top Plate (3T) Mounting Type  
Reinforced, impact-resistant polypropylene Wheel Center with High-Quality Reinforced  
Polypropylene Rubber (TPR) Wheel Tread  
Dark gray, Bearing – Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

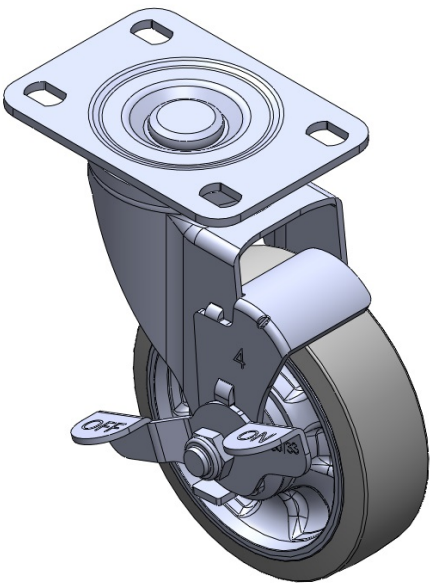

Picture may differ from original product


Technical Data

|                                                                        |                               |
|------------------------------------------------------------------------|-------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                               |
| Wheel Diameter                                                         | 100mm                         |
| Wheel Width                                                            | 31mm                          |
| Wheel Bearing                                                          | Wheels With Ball Bearings     |
| Plate Size                                                             | 96 x 69mm                     |
| Bolt Hole Spacing                                                      | 75 x 45mm                     |
| Plate Hole                                                             | 13 x 9mm                      |
| Offset                                                                 | 40mm                          |
| Swivel Interference                                                    | 180mm                         |
| Overall Height                                                         | 139mm                         |
| Swivel Radius                                                          | 90mm                          |
| Hardness Of Tread                                                      | 72±5° Shore A                 |
| Load Capacity (Dynamic)                                                | 125kgs                        |
| Load Capacity (Static)                                                 | 187.5kgs                      |
| Temperature                                                            | -20°C to +60°C                |
| Fork Type                                                              | Swivel Caster With Side Brake |
| Stainless                                                              | N/A                           |
| Electrical Conductivity                                                | N/A                           |
| Anti-Static                                                            | N/A                           |
| Weight                                                                 | 0.70kgs                       |
| Standard                                                               | ISO22883                      |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

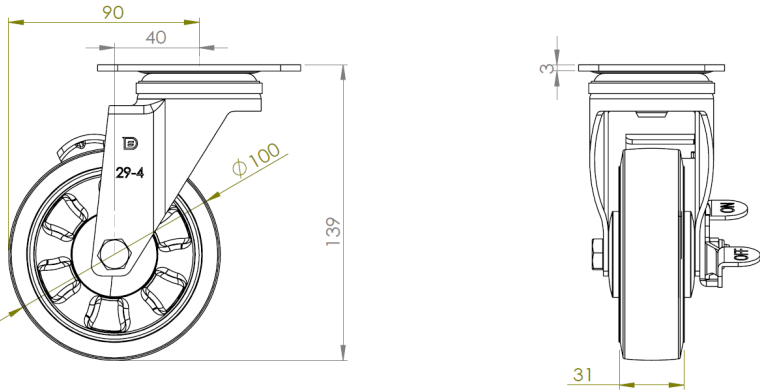

Mounting

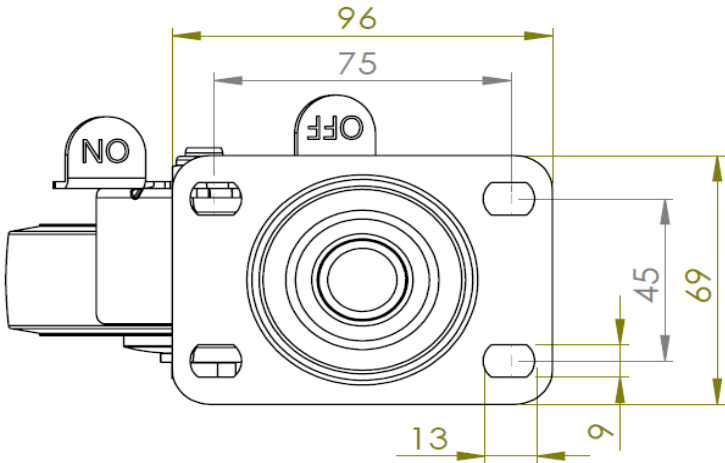

\* For any deviation between metric and imperial spec, please refer to the metric spec.