1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR Wheel Diameter × Wheel Width 100 x 31mm

EAN

TW-4112904004025

Casters with Side Brakes and With locking system. Threaded Stem Riveted Pressed Fork -1/2-12 threads.


Zine-Plated, Mounting Type - Threaded Stem. High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Dark gray, Plain Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

100mm Wheel Diameter Wheel Width 31mm

Wheel With Plain Bearing Wheel Bearing

1/2"-12牙 **Threaded Stem** Threaded Size 32mm Offset 40mm Swivel Interference 180mm Overall Height 139mm **Swivel Radius** 90mm

Hardness Of Tread 82±5° Shore A

80kgs Load Capacity (Dynamic) Load Capacity (Static) 120kgs

Temperature -20°C to +60°C

Swivel Caster With Side Brake Fork Type

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.65kgs ISO22883 Standard


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

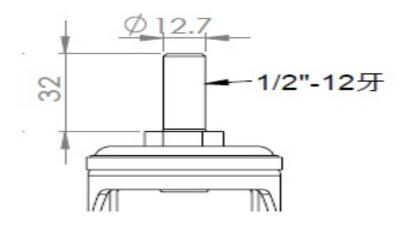

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.