1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR Wheel Diameter × Wheel Width 100 x 31mm

EAN

TW-4112904004030

Total Brake locking system. Threaded Stem Riveted Pressed Fork - 3/8-16"
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread
Dark gray, Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheel With Plain Bearing

Threaded Stem 3/8 " -16 牙
Threaded Size 32mm
Offset 40mm
Swivel Interference 212mm
Overall Height 141mm
Swivel Radius 106mm
Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 80kgs
Load Capacity (Static) 120kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake


StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight0.65kgsStandardISO22883

Advantages at a glance


Rolling Resistance
Operating Noise

Floor Surface Preservation • • • • •

Dimensions

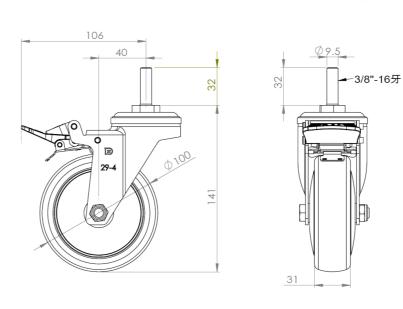

Mounting

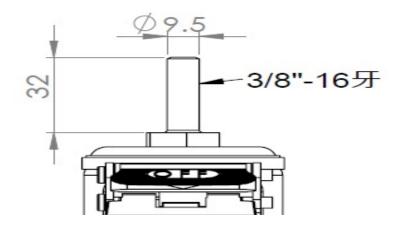

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.