# 1129 Medical Caster Series

Dersheng Casters Keep Rolling

Resolute Wheel Diameter × Wheel Width 100 x 31mm


EAN

TW-4112904004041

Casters with Side Brakes and With locking system. Threaded Stem Riveted Pressed Fork - 3/8" - 16 UNC Anodized finish, Mounting Type - Threaded Stem High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing - Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

### ● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 3/8"-16牙
Threaded Size 32mm
Offset 40mm
Swivel Interference 180mm
Overall Height 141mm
Swivel Radius 90mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 125kgs
Load Capacity (Static) 187.5kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.65kgs

Standard ISO22883

## Advantages at a glance

Rolling Resistance


• • • •


Operating Noise

• • • • •


Floor Surface Preservation • • • • •

### **Dimensions**





Mounting

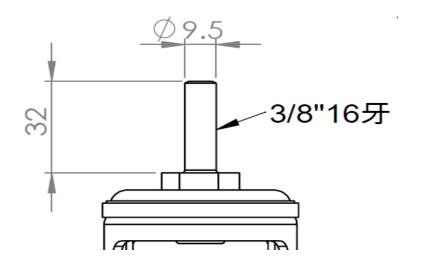

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.