1129 Medical Caster Series

Dersheng Casters Keep Rolling

Nylon Wheel Diameter × Wheel Width 125 x 38mm


EAN

TW-4112905001016

Rigid Caster with integrally molded Stamping footrest and 72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate. Reinforced Polypropylene and Wheel Tread. Bearing - Plain Bearing.

Wheel surface: Thermoplastic plastic (PA6)
Wheel Center: Thermoplastic plastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Weight

Standard

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 38mm

Wheel Bearing Wheel With Plain Bearing

Plate Size 92 x 70mm

Bolt Hole Spacing 72 x 53mm

Plate Hole 10mm

Overall Height 162mm

Hardness Of Tread 75±5° Shore D Load Capacity (Dynamic) 130kgs Load Capacity (Static) 195kgs -20°C to +80°C Temperature Fork Type Rigid Caster Stainless N/A **Electrical Conductivity** N/A N/A Anti-Static

0.50kgs

ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

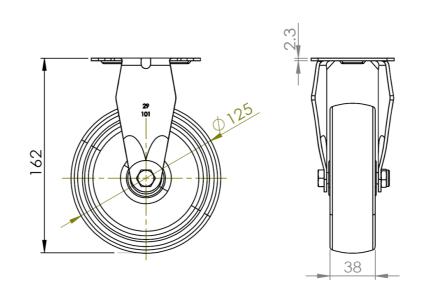

Mounting

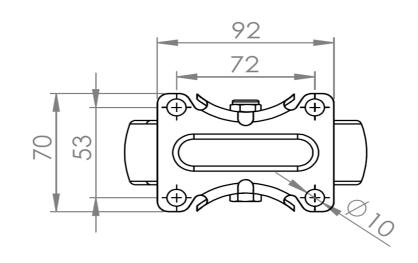

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.