1129 Medical Caster Series

Dersheng Casters Keep Rolling

AQPU (grey) Wheel Diameter × Wheel Width 125 x 31mm


EAN

TW-4112905001023

Rigid Caster with integrally molded, Stamping footrest and 72 x 53.5 mm (2-7/8" x 2-1/8") Bolt Hole Spacing.
Chrome-Plated finish, Mounting Type - Top Plate with plastic cover.
Aluminum wheel center with High Quality Polyurethane Wheel Tread.
Gray, Bearing with Ball Bearings.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 92 x 70mm

Bolt Hole Spacing 72 x 53mm

Plate Hole 10mm

Overall Height 162mm

Hardness Of Tread 77±5° Shore A

Load Capacity (Dynamic) 230kgs

Load Capacity (Static) 345kgs

Temperature -20°C to +70°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.50kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise • • • • •

Floor Surface Preservation • • • • •

Dimensions

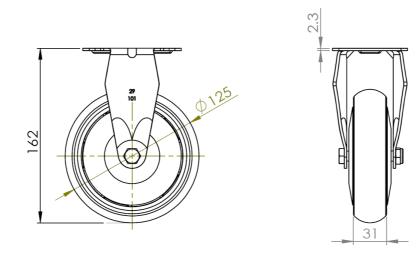

Mounting

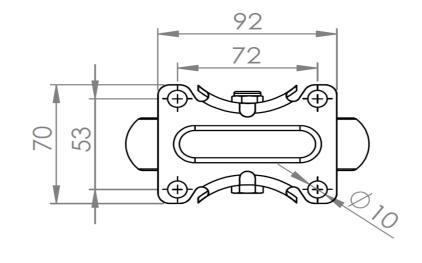

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.