1129 Medical Caster Series

Dersheng Casters Keep Rolling

Resolute Wheel Diameter x Wheel Width 125 x 36mm

EAN


TW-4112905001027

Rigid Caster with Stamping Fabricated Caster Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing.

Zine-Plated, Mounting Type - Top Plate.
High-Quality Impact-Resistant Polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.
Black-blue color, Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR) Wheel Center: high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

125mm Wheel Diameter Wheel Width 36mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 92 x 70mm **Bolt Hole Spacing** 75 x 45mm Plate Hole 12 x 9mm Overall Height 162mm Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 180kgs

Load Capacity (Static) 270kgs Temperature -20°C to +60°C Fork Type Rigid Caster

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.50kgs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

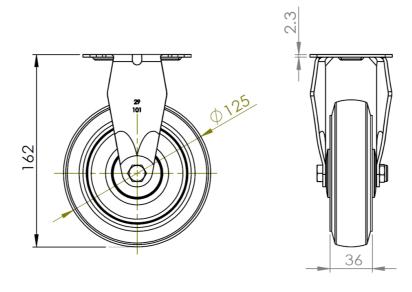

Mounting

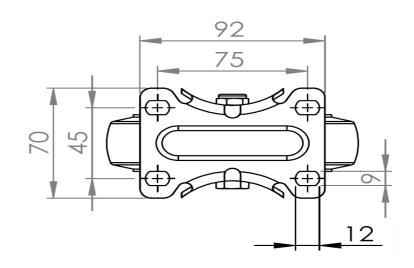

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.