



1129 Medical Caster Series


PPR Wheel Diameter × Wheel Width 125 x 31mm

EAN  
TW-4112905002015

Swivel Caster with Riveted Stamping Fork - 3/8-16 threads  
Zine-Plated, Mounting Type - Threaded Stem  
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Dark gray, wheel - Plain Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

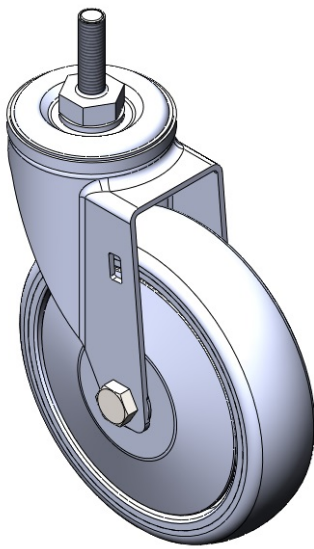

Picture may differ from original product


Technical Data

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                          |
| Wheel Diameter                                                         | 125mm                    |
| Wheel Width                                                            | 31mm                     |
| Wheel Bearing                                                          | Wheel With Plain Bearing |
| Threaded Stem                                                          | 3/8 " -16牙               |
| Threaded Size                                                          | 32mm                     |
| Offset                                                                 | 37.5mm                   |
| Swivel Interference                                                    | 200mm                    |
| Overall Height                                                         | 166mm                    |
| Swivel Radius                                                          | 100mm                    |
| Hardness Of Tread                                                      | 82±5° Shore A            |
| Load Capacity (Dynamic)                                                | 100kgs                   |
| Load Capacity (Static)                                                 | 150kgs                   |
| Temperature                                                            | -20°C to +60°C           |
| Fork Type                                                              | Swivel Caster            |
| Stainless                                                              | N/A                      |
| Electrical Conductivity                                                | N/A                      |
| Anti-Static                                                            | N/A                      |
| Weight                                                                 | 0.65kgs                  |
| Standard                                                               | ISO22883                 |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

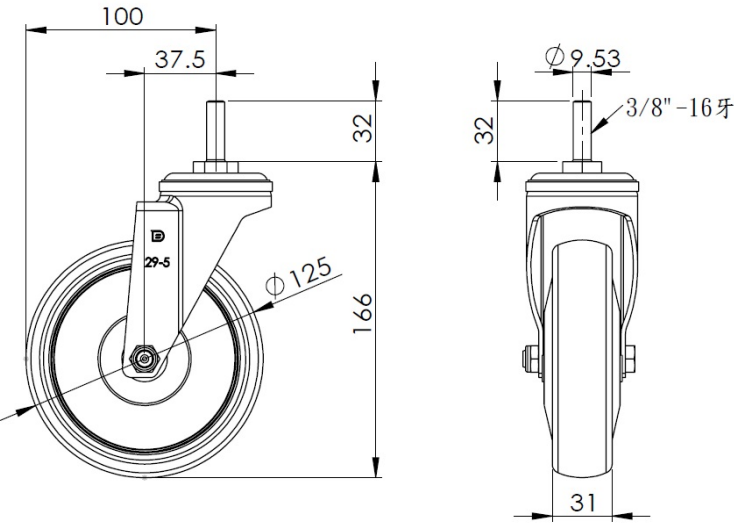

Mounting

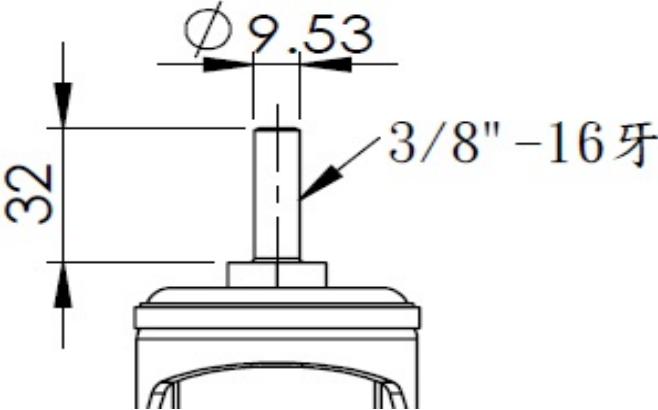

\* For any deviation between metric and imperial spec, please refer to the metric spec.