1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR Wheel Diameter × Wheel Width 125 x 31mm

EAN

TW-4112905004028

Casters with Total Brakes and a With locking system. Threaded Stem Riveted Pressed Fork - 5/8-11.


Zine-Plated, Mounting Type - Threaded Stem. High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Dark gray, Plain Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

125mm Wheel Diameter Wheel Width 31mm

Wheel Bearing Wheel With Plain Bearing

5/8"-11牙 **Threaded Stem Threaded Size** 32mm Offset 37.5mm Swivel Interference 212mm Overall Height 166mm **Swivel Radius** 106mm Hardness Of Tread 82±5° Shore A 100kgs Load Capacity (Dynamic)

150kgs Load Capacity (Static) Temperature -20°C to +60°C

Swivel Caster With Total Brake Fork Type

ISO22883

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.80kgs

Standard


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

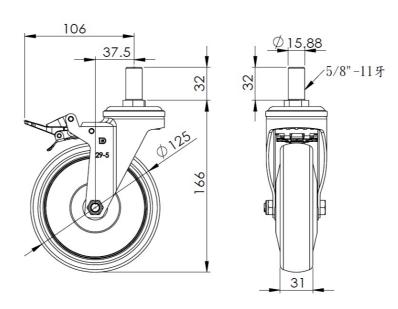

Mounting

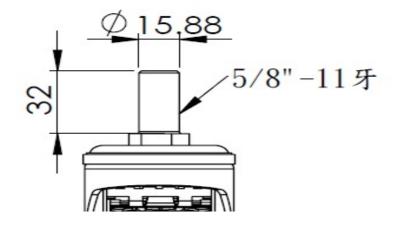

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.