1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR Wheel Diameter × Wheel Width 125 x 31mm

EAN

TW-4112905004029

Casters with Side Brakes and With locking system. Threaded Stem Riveted Pressed Fork with 3/8-16 threads.


Zine-Plated, Mounting Type - Threaded Stem.
High-Quality Impact-Resistant Polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Dark gray, Plain Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

5" Wheel Diameter 1-1/4 " Wheel Width

Wheel Bearing Wheel With Plain Bearing

3/8"-16牙 Threaded Stem Threaded Size 1-5/16 " 1-1/2 " Offset 8 " Swivel Interference Overall Height 6-9/16 " **Swivel Radius**

Hardness Of Tread 82±5° Shore A

220lbs Load Capacity (Dynamic) Load Capacity (Static) 331lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Side Brake

ISO22883

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 1.8lbs

Standard


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

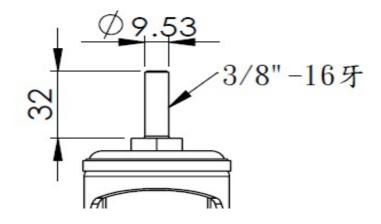

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.