


## 1130 Medium Duty General Purposes Caster Series

PPR E-conductive Wheel Diameter x Wheel Width 75 x 31mm

EAN

TW-4113003001015

Rigid Caster with Stamping Fabricated Caster Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing. Zinc-Plated, Mounting Type - Top Plate. High-Quality Impact-Resistant Polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread. Dark gray. Bearings: Ball Bearings.

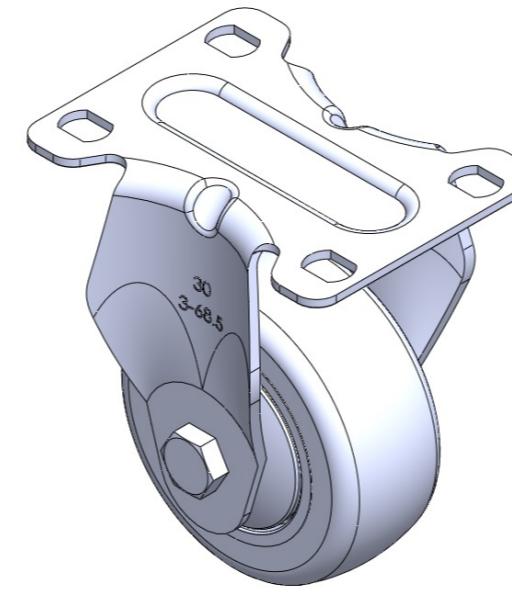

Picture may differ from original product

Drawings are for reference only and may differ from the product

## Technical Data

 Metric  Imperial

Wheel Diameter 75mm

Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 92 x 70mm

Bolt Hole Spacing 75X45mm

Plate Hole 12 x 9mm

Overall Height 106mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 70kgs

Load Capacity (Static) 105kgs

Temperature -20°C to +60°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity Y 導電值:10^4~10^6

Anti-Static N/A

Weight 0.40kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • • ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • •

## Dimensions

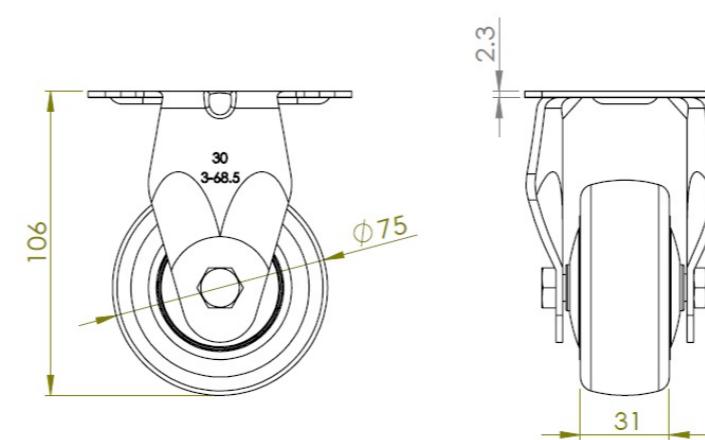

## Mounting

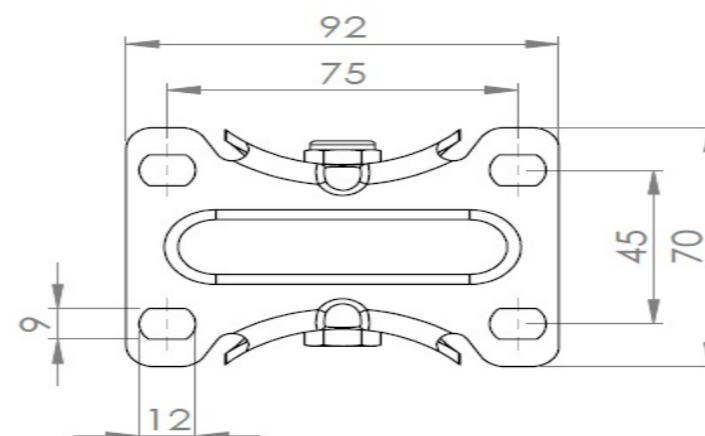

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com