



1130 Medium Duty General Purposes Caster Series


PU Wheel Diameter × Wheel Width 75 x 32mm

EAN  
TW-4113003001028

Rigid Caster with Stamping Fabricated Caster Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate, chrome plated. Cast Iron core with High Quality Polyurethane Wheel Tread. Red Cast Iron finish. Bearings: Ball Bearings.

Wheel tread: high quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

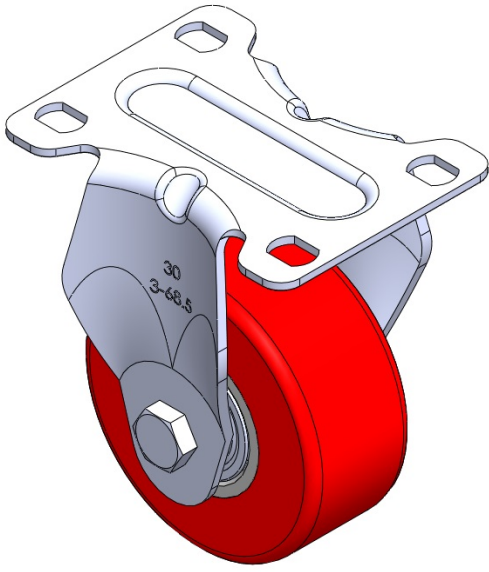

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 3 "                       |
| Wheel Width                                                            | 1-5/16 "                  |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 3-11/16 " x 2-13/16 "     |
| Bolt Hole Spacing                                                      | 3 " x 1-13/16 "           |
| Plate Hole                                                             | 1/2 " x 23/64 "           |
| Overall Height                                                         | 4-1/4 "                   |
| Hardness Of Tread                                                      | 93±5° Shore A             |
| Load Capacity (Dynamic)                                                | 397lbs                    |
| Load Capacity (Static)                                                 | 595lbs                    |
| Temperature                                                            | -4°F to +158°F            |
| Fork Type                                                              | Rigid Caster              |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 0.9lbs                    |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

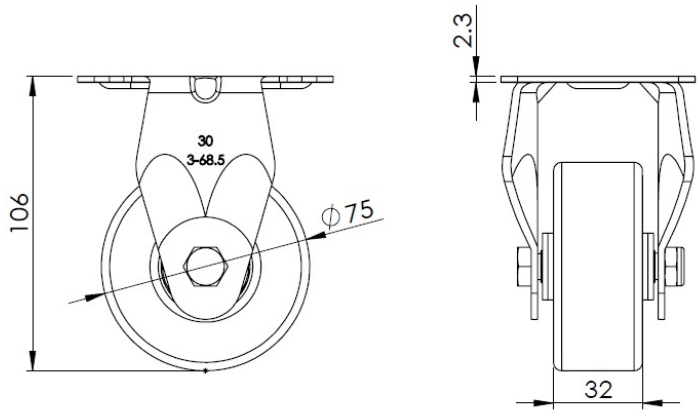

Mounting

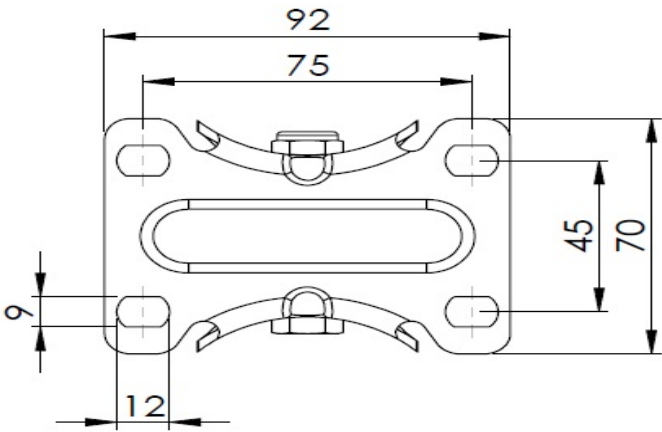

\* For any deviation between metric and imperial spec, please refer to the metric spec.