

1130 Series 30 American Standard Tripod Series



PU wheel wheel diameter × wheel width 75 x 32mm

EAN

TW-4113003001035

Fixed castors, one-piece stamped footrest - advanced holes
Galvanized surface, base plate installation
Cast iron wheel core, high quality polyurethane wheel tread
Milled red, wheel bearings—precision ball bearings.

Wheel tread: high quality polyurethane
Wheel core: iron core/cast iron core

Product descriptions are for reference only. The actual product shall prevail.



Picture may differ from original product


Technical Data

| | |
|--|-----------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial | |
| Wheel Diameter | 75mm |
| Wheel Width | 32mm |
| Wheel Bearing | wheel equipped with ball bearings |
| Plate size | 90 x 72mm |
| Base plate hole spacing | 75 x 45mm |
| Plate hole | 12 x 9mm |
| Overall height | 106mm |
| Hardness of tread | 93±5° Shore A |
| Load capacity (dynamic) | 180kgs |
| Load capacity (static) | 270kgs |
| Temperature | -20°C to +70°C |
| Stand Style | fixed |
| Stainless steel | N/A |
| Conductive | N/A |
| Anti | N/A |
| Weight | 0.40kgs |
| Standard | ISO22883 |

Advantages at a glance

| | |
|----------------------------|-----------|
| Rolling Resistance | ● ● ● ○ ○ |
| Operating Noise | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

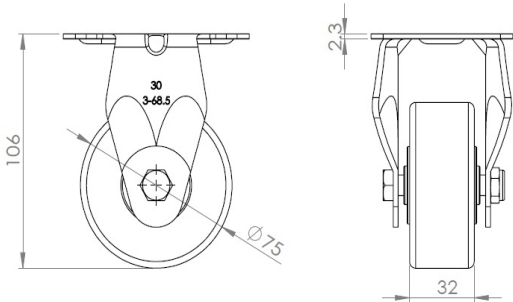

Mounting

