

1130 Medium Duty General Purposes Caster Series




PP Wheel Diameter × Wheel Width 75 x 32mm

EAN  
TW-4113003002015

Swivel Caster with Riveted Stamping Fork - Ø11x38L Zine-Plated, Mounting Type - Cylindrcal Stem, brass buckle Polypropylene core and Wheel Tread Black, Plain Bearing.

Wheel tread: PP polypropylene  
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

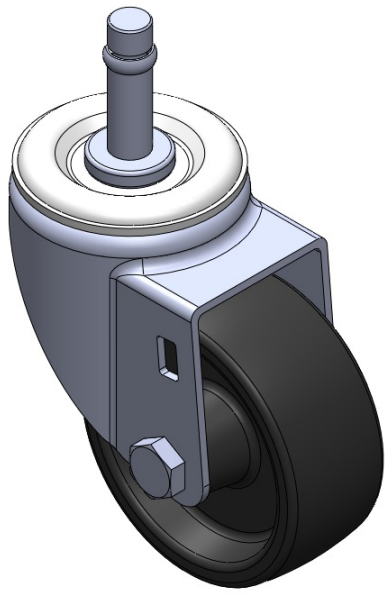

Picture may differ from original product


Technical Data

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                          |
| Wheel Diameter                                                         | 75mm                     |
| Wheel Width                                                            | 32mm                     |
| Wheel Bearing                                                          | Wheel With Plain Bearing |
| Diameter                                                               | 11mm                     |
| Stem Hole Spec                                                         | 38mm                     |
| Offset                                                                 | 35mm                     |
| Swivel Interference                                                    | 146mm                    |
| Overall Height                                                         | 102mm                    |
| Swivel Radius                                                          | 73mm                     |
| Hardness Of Tread                                                      | 65±5° Shore D            |
| Load Capacity (Dynamic)                                                | 90kgs                    |
| Load Capacity (Static)                                                 | 135kgs                   |
| Temperature                                                            | -10°C to +60°C           |
| Fork Type                                                              | Swivel Caster            |
| Stainless                                                              | N/A                      |
| Electrical Conductivity                                                | N/A                      |
| Anti-Static                                                            | N/A                      |
| Weight                                                                 | 0.50kgs                  |
| Standard                                                               | ISO22883                 |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ○ ○ |
| Floor Surface Preservation | ● ● ● ○ ○ |

Dimensions

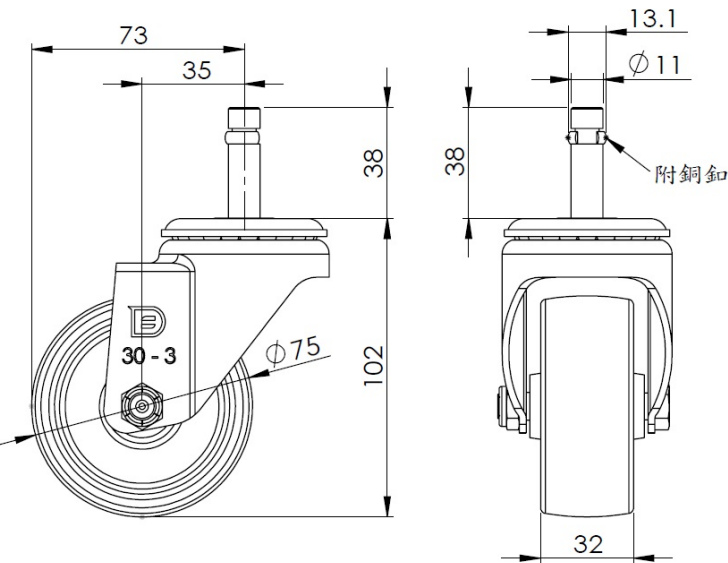

Mounting

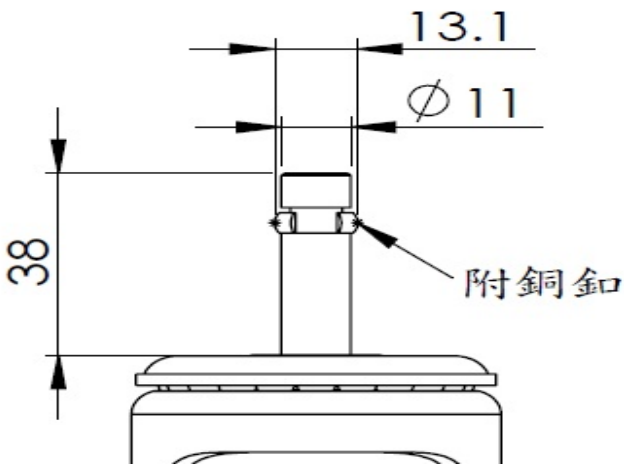

\* For any deviation between metric and imperial spec, please refer to the metric spec.