# 1130 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

PP Wheel Diameter × Wheel Width 75 x 32mm


EAN

TW-4113003002015

Swivel Caster with Riveted Stamping Fork - Ø11x38L Zine-Plated, Mounting Type - Cylindrical Stem, brass buckle Polypropylene core and Wheel Tread Black, Plain Bearing.

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-5/16 "

Wheel Bearing Wheel With Plain Bearing

Diameter 3/8 " 1-1/2 " Stem Hole Spec 1-3/8 " Offset 5-13/16" **Swivel Interference** 4-1/16 " Overall Height 2-15/16" **Swivel Radius** Hardness Of Tread 65±5° Shore D Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature 14°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.1lbs

ISO22883

Standard

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

### Dimensions

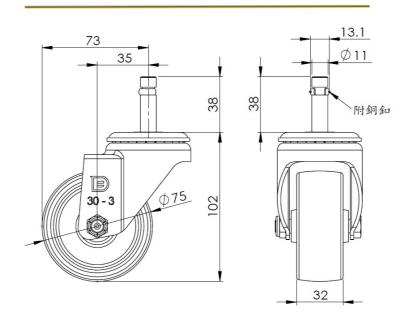

## Mounting

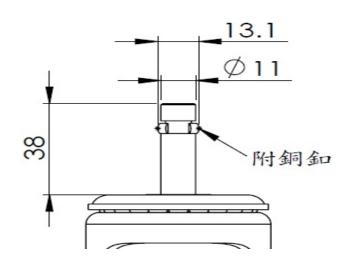

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.