


1130 Medium Duty General Purposes Caster Series

PP Wheel Diameter x Wheel Width 75 x 32mm

EAN

TW-4113003002021

Swivel Caster with Riveted Fork and Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing
Zinc-Plated, Mounting Type - Top Plate Polypropylene Wheel Center and Wheel Tread
Black, wheel - Plain Bearing.

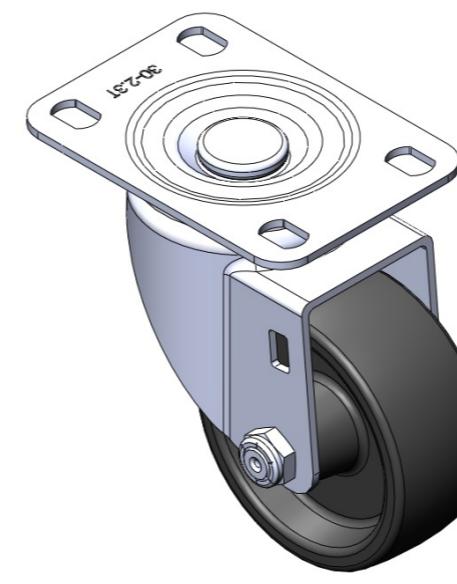

Wheel tread: PP polypropylene
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	75mm
Wheel Width	32mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	96 x 69mm
Bolt Hole Spacing	75X45mm
Plate Hole	13 x 9mm
Offset	35mm
Swivel Interference	146mm
Overall Height	106mm
Swivel Radius	73mm
Hardness Of Tread	65±5° Shore D
Load Capacity (Dynamic)	90kgs
Load Capacity (Static)	135kgs
Temperature	-10°C to +60°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.60kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • ○ ○
Floor Surface Preservation	• • • ○ ○

Dimensions

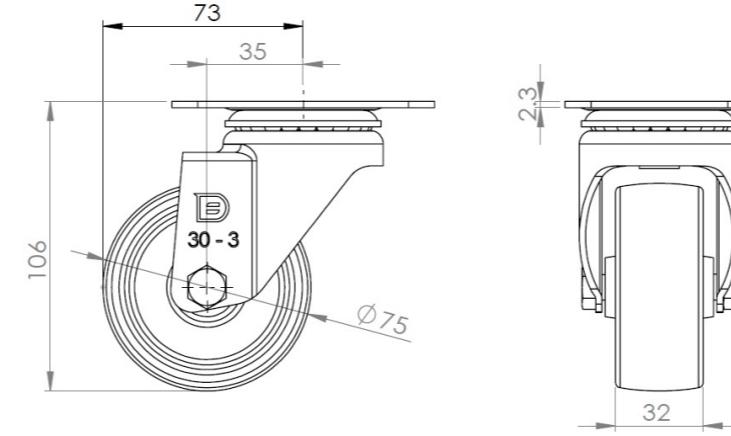

Mounting

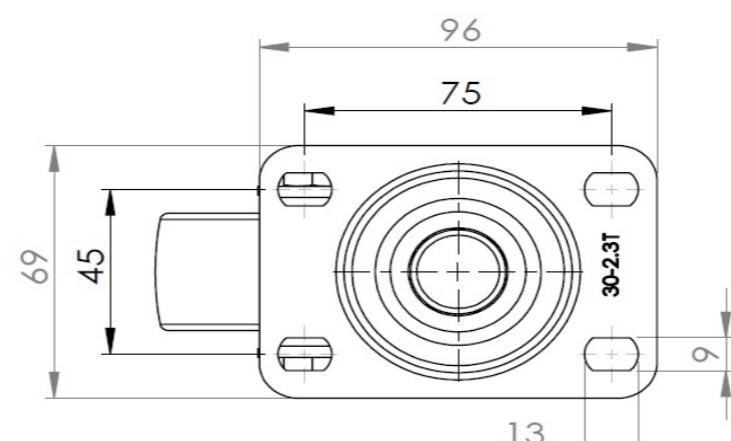

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com