



1130 Medium Duty General Purposes Caster Series


PP Wheel Diameter × Wheel Width 75 x 32mm

EAN
TW-4113003002021

Swivel Caster with Riveted Fork and Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing
Zine-Plated, Mounting Type - Top Plate Polypropylene Wheel Center and Wheel Tread
Black, wheel - Plain Bearing.

Wheel tread: PP polypropylene
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

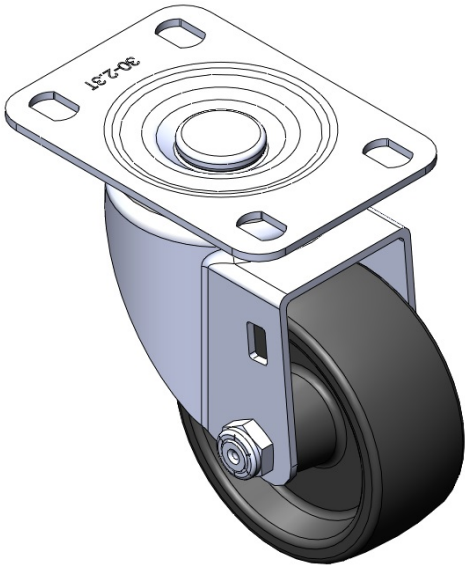

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	3 "
Wheel Width	1-5/16 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	3-7/8 " x 2-3/4 "
Bolt Hole Spacing	3
Plate Hole	9/16 " x 23/64 "
Offset	1-3/8 "
Swivel Interference	5-13/16 "
Overall Height	4-1/4 "
Swivel Radius	2-15/16 "
Hardness Of Tread	65±5° Shore D
Load Capacity (Dynamic)	198lbs
Load Capacity (Static)	298lbs
Temperature	14°F to +140°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.3lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ○ ○
Floor Surface Preservation	● ● ● ○ ○

Dimensions

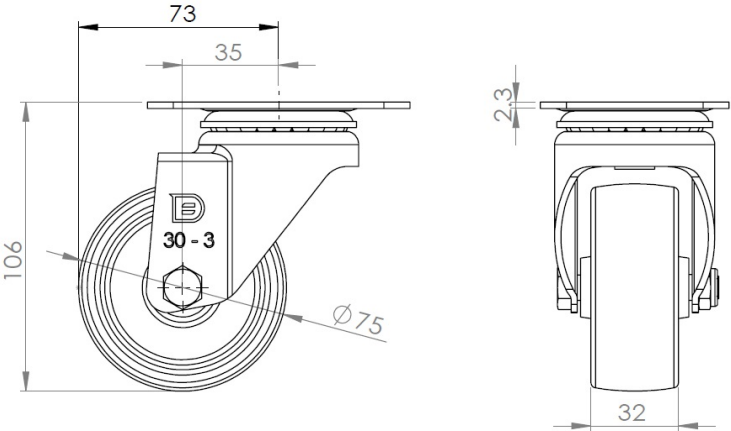

Mounting

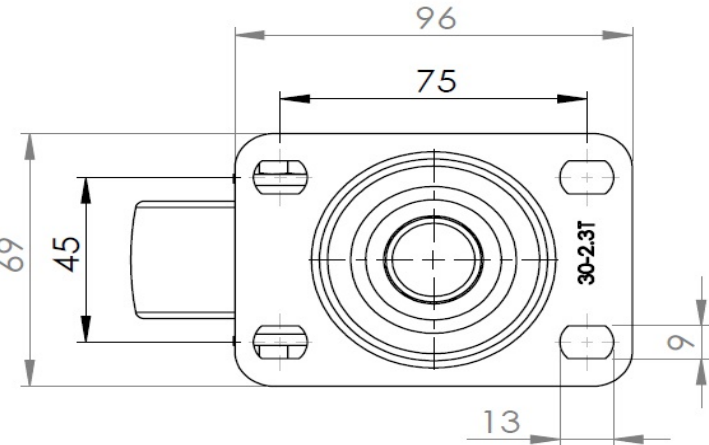

* For any deviation between metric and imperial spec, please refer to the metric spec.