



1130 Medium Duty General Purposes Caster Series


PP Wheel Diameter × Wheel Width 75 x 32mm

EAN  
TW-4113003002033

Swivel Caster with Riveted Stamping Fork - 1/2-12 threads  
Zine-Plated, Mounting Type - Top Plate  
Polypropylene core and Wheel Tread  
Black, Plain Bearing.

Wheel tread: PP polypropylene  
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

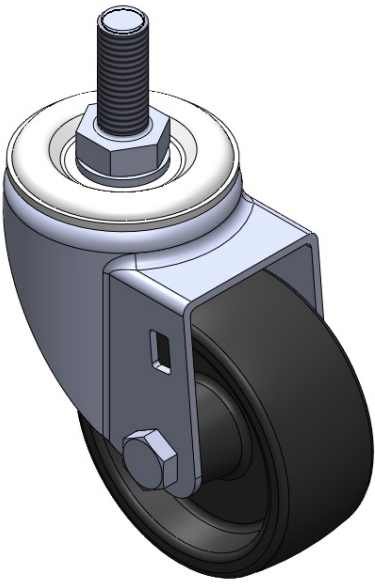

Picture may differ from original product


Technical Data

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                          |
| Wheel Diameter                                                         | 3 "                      |
| Wheel Width                                                            | 1-5/16 "                 |
| Wheel Bearing                                                          | Wheel With Plain Bearing |
| Threaded Stem                                                          | 1/2 " -12牙               |
| Threaded Size                                                          | 1-5/16 "                 |
| Offset                                                                 | 1-3/8 "                  |
| Swivel Interference                                                    | 5-13/16 "                |
| Overall Height                                                         | 4-5/16 "                 |
| Swivel Radius                                                          | 2-15/16 "                |
| Hardness Of Tread                                                      | 65±5° Shore D            |
| Load Capacity (Dynamic)                                                | 198lbs                   |
| Load Capacity (Static)                                                 | 298lbs                   |
| Temperature                                                            | 14°F to +140°F           |
| Fork Type                                                              | Swivel Caster            |
| Stainless                                                              | N/A                      |
| Electrical Conductivity                                                | N/A                      |
| Anti-Static                                                            | N/A                      |
| Weight                                                                 | 1.1lbs                   |
| Standard                                                               | ISO22883                 |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ○ ○ |
| Floor Surface Preservation | ● ● ● ○ ○ |

Dimensions

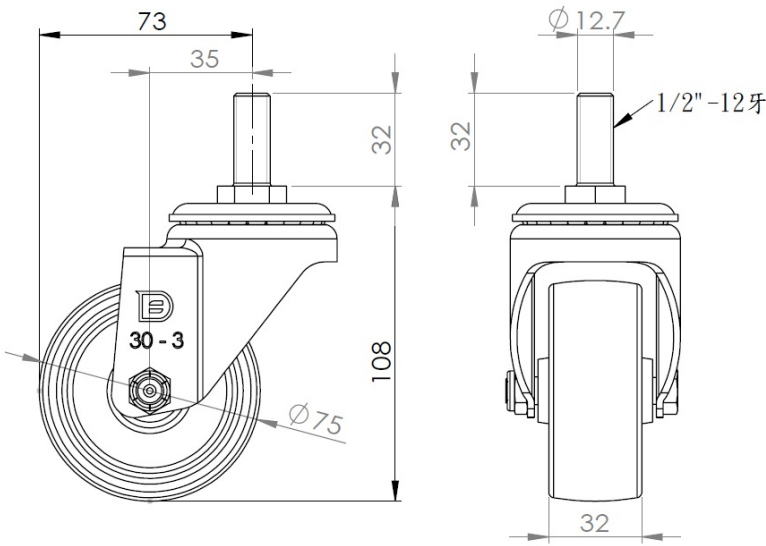

Mounting

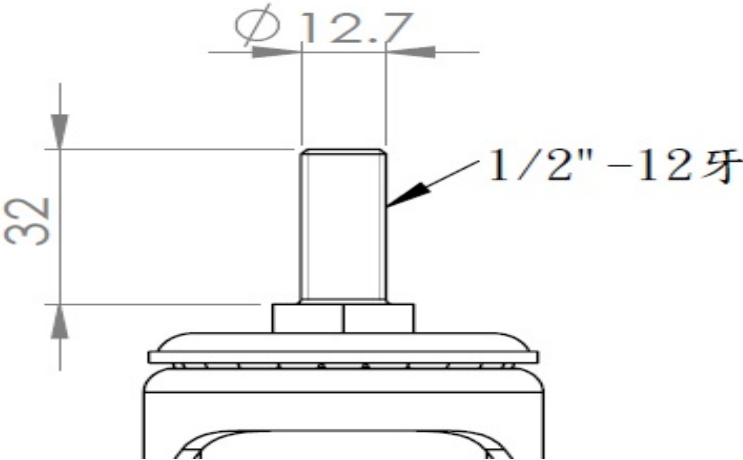

\* For any deviation between metric and imperial spec, please refer to the metric spec.