1130 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

Resolute Wheel Diameter × Wheel Width 75 x 31mm

EAN


TW-4113003002051

Swivel Caster, Riveted Stamping Fork - 1/2-12 threads
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread
Dark gray, Bearing - Ball Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 1/2"-12牙
Threaded Size 32mm
Offset 35mm
Swivel Interference 146mm
Overall Height 108mm
Swivel Radius 73mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 90kgs

Load Capacity (Static) 135kgs

Temperature -20°C to +60°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.50kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance


• • • •

Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

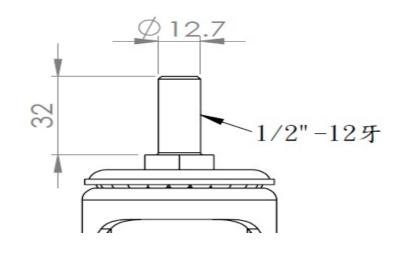

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.