



1130 Medium Duty General Purposes Caster Series


Rubber Wheel Diameter × Wheel Width 75 x 31mm

EAN
TW-4113003004105

Casters with Total Brakes and a With locking system. Threaded Stem, Riveted, Stamping Fork—3/8"-16" UNC's
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Resilient Rubber Wheel Tread and core
Black, Plain Bearings

Wheel surface: high-quality elastic rubber
Wheel Center: high quality elastic rubber

Drawings are for reference only and may differ from the product

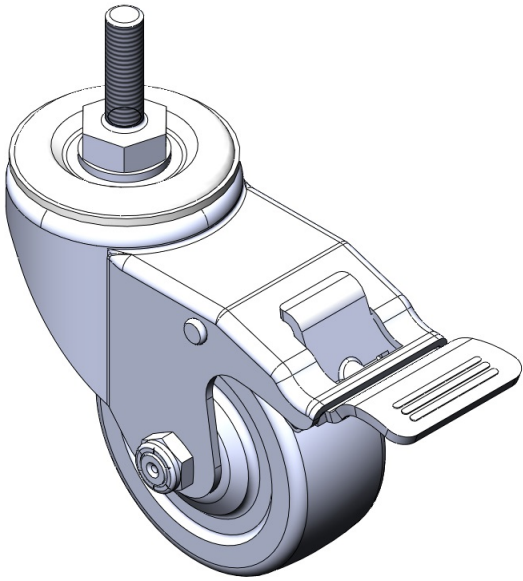

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	3 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	3/8 " -16牙
Threaded Size	1-5/16 "
Offset	1-5/8 "
Swivel Interference	9-1/2 "
Overall Height	4-5/16 "
Swivel Radius	4-13/16 "
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	198lbs
Load Capacity (Static)	298lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster With Total Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.5lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ● ○

Dimensions

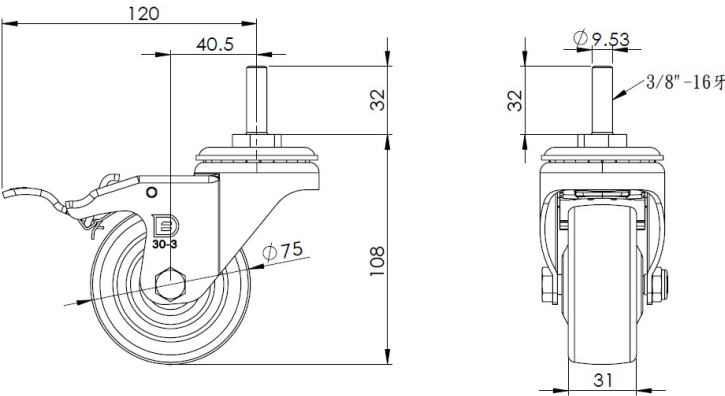

Mounting

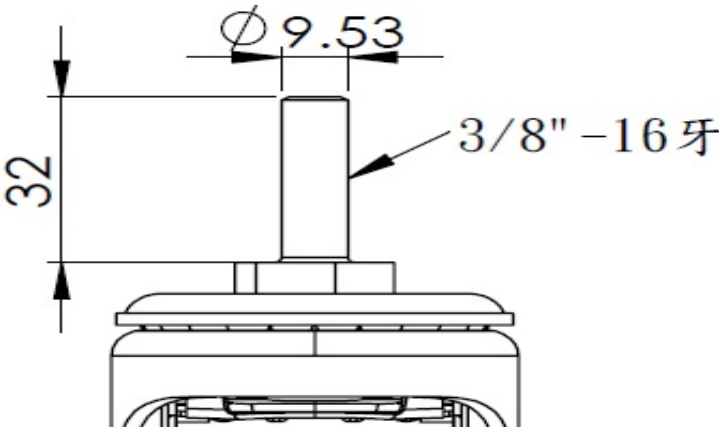

* For any deviation between metric and imperial spec, please refer to the metric spec.