



1130 Medium Duty General Purposes Caster Series


PU Wheel Diameter × Wheel Width 75 x 32mm

EAN
TW-4113003004107

Casters with Total Brakes and a With locking system. Top Plate Riveted and Stamping - instrument Fork. Hole Zine-Plated, Mounting Type - Top Plate. Cast Iron core with High Quality Polyurethane Wheel Tread. Red Cast Iron finish, Bearing - Ball Bearings.

Wheel tread: high quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

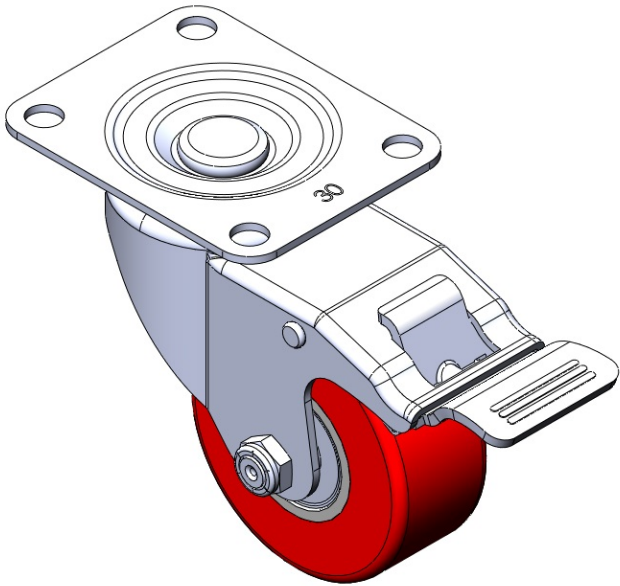

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	3 "
Wheel Width	1-5/16 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	3-5/8 " x 2-15/16 "
Bolt Hole Spacing	2-7/8 " x 2-1/8 "
Plate Hole	3/8 "
Offset	1-5/8 "
Swivel Interference	9-1/2 "
Overall Height	4-1/4 "
Swivel Radius	4-13/16 "
Hardness Of Tread	93±5° Shore A
Load Capacity (Dynamic)	397lbs
Load Capacity (Static)	595lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster With Total Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.7lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

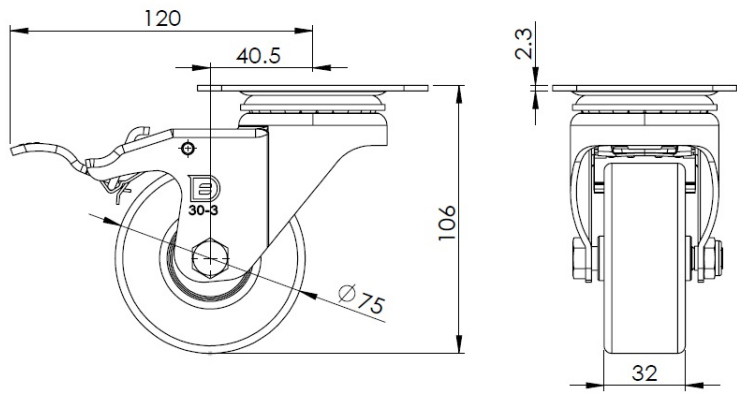

Mounting

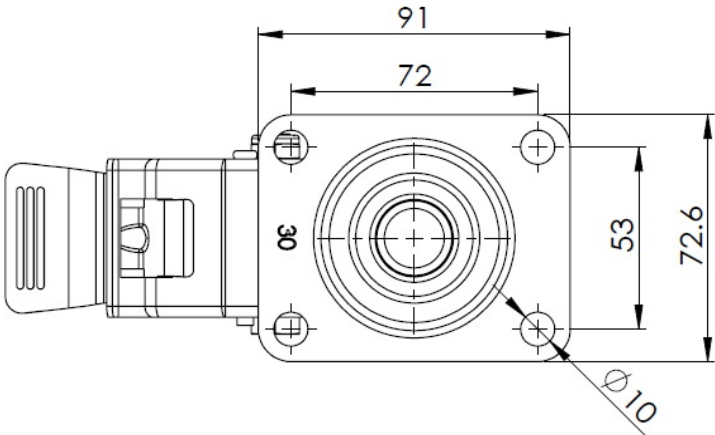

* For any deviation between metric and imperial spec, please refer to the metric spec.