



1130 Medium Duty General Purposes Caster Series


AQPU (grey) wheel Diameter × Wheel Width 100 x 31mm

EAN
TW-4113004004022

Casters with Total Brakes and With locking system. Threaded Stem Riveted Pressed Fork —1/2-12.
Zine-Plated, Mounting Type - Top Plate.
Aluminum wheel center, High Quality Polyurethane Wheel Tread.
Gray color, Bearing—Ball Bearings.

Wheel tread: high quality polyurethane
Wheel Center: aluminum core

Drawings are for reference only and may differ from the product

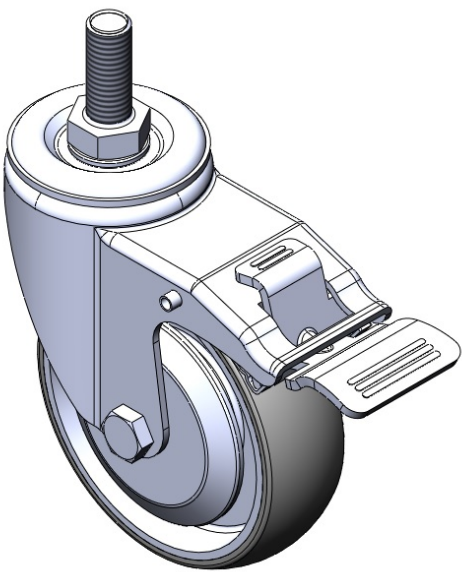

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	4 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	1/2 " -12牙
Threaded Size	1-5/16 "
Offset	1-5/16 "
Swivel Interference	9-1/2 "
Overall Height	5-1/4 "
Swivel Radius	4-13/16 "
Hardness Of Tread	77±5° Shore A
Load Capacity (Dynamic)	507lbs
Load Capacity (Static)	761lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster With Total Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.7lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

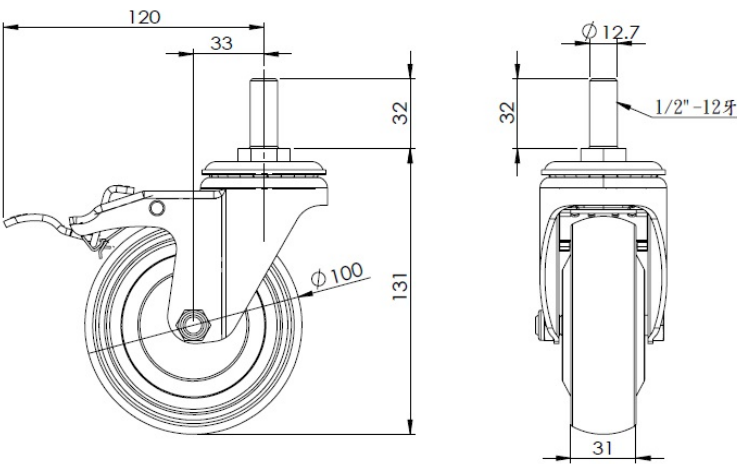

Mounting

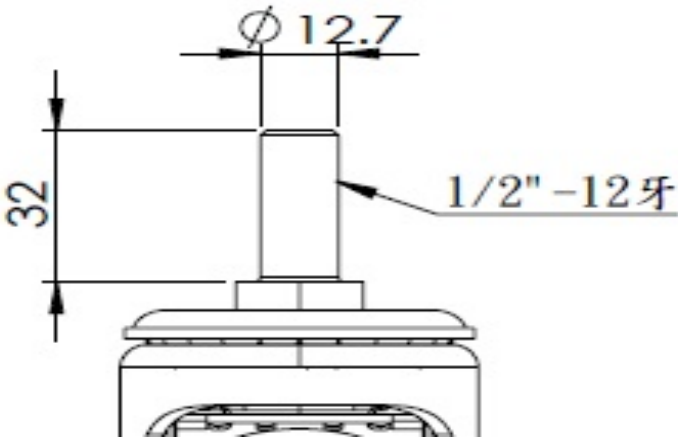

* For any deviation between metric and imperial spec, please refer to the metric spec.