

# 1130 Medium Duty General Purposes Caster Series




W Resolute Wheel Diameter × Wheel Width 100 x 31mm

EAN  
TW-4113004004023

Casters with a Total Brake and With locking system. Threaded Stem, Riveted, Stamping Fork—1/2-12" UNC's  
Zine-Plated, Mounting Type - Threaded Stem  
Reinforced, impact-resistant polypropylene core, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

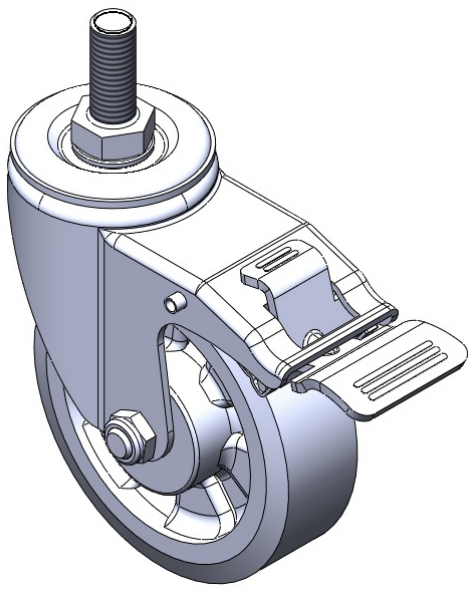

Picture may differ from original product


## Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                                |
| Wheel Diameter                                                         | 100mm                          |
| Wheel Width                                                            | 31mm                           |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Threaded Stem                                                          | 1/2 " -12牙                     |
| Threaded Size                                                          | 32mm                           |
| Offset                                                                 | 33mm                           |
| Swivel Interference                                                    | 240mm                          |
| Overall Height                                                         | 131mm                          |
| Swivel Radius                                                          | 120mm                          |
| Hardness Of Tread                                                      | 72±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 135kgs                         |
| Load Capacity (Static)                                                 | 202.5kgs                       |
| Temperature                                                            | -20°C to +60°C                 |
| Fork Type                                                              | Swivel Caster With Total Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 0.75kgs                        |
| Standard                                                               | ISO22883                       |


## Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

## Dimensions

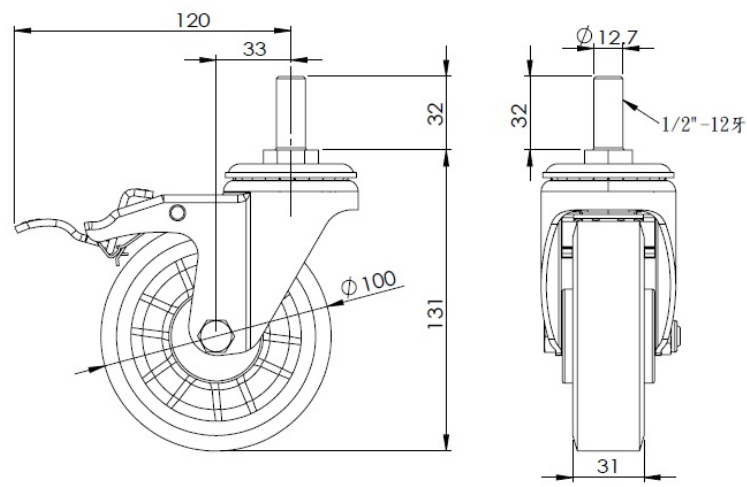

## Mounting

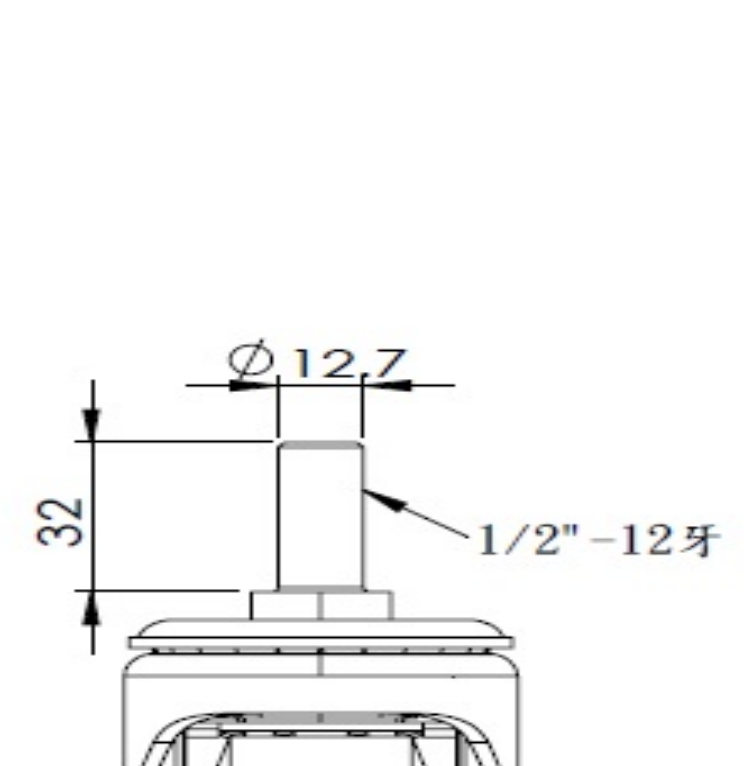

\* For any deviation between metric and imperial spec, please refer to the metric spec.