1153-1 Heavy Duty 2" Wide General Purposes Caster (European Style) Series

ERSHENGDersheng Casters Keep Rolling

W Resolute Wheel Diameter × Wheel Width 152 x 50mm

EAN


TW-4115306001056

Rigid Caster with Stamping Fabricated Caster Fork
Zine-Plated, Mounting Type - Top Plate
Reinforced, impact-resistant polypropylene core with High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread
Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 152mm
Wheel Width 50mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 125 x 120mm **Bolt Hole Spacing** 92.5 x 84.5mm Plate Hole 15 x 11mm Offset 54mm 260mm **Swivel Interference** Overall Height 191mm 60mm **Swivel Radius** Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 272kgs

Load Capacity (Static) 408kgs

Temperature -20°C to +60°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

1.50kgs

Standard

ISO22883

Advantages at a glance


Rolling Resistance

• • • • •


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

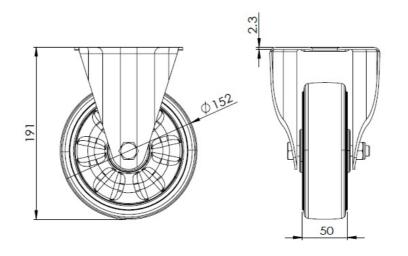

Mounting

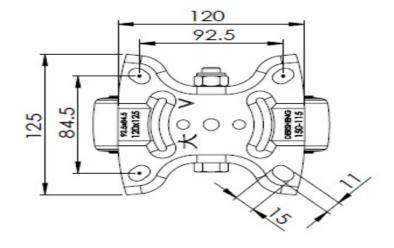

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.