# 1153-1 Heavy Duty 2" Wide General Purposes Caster (European Style) Series

Dersheng Casters Keep Rolling

WMRC Wheel Diameter × Wheel Width 150 x 40mm


EAN

TW-4115306002053

Swivel Caster with Riveted Fork and Stamping Fork.
Zine-Plated, Mounting Type - Top Plate.
Reinforced thermoplastic plastic Wheel Center and Wheel Tread.
Bearings—Ball Bearings.

Wheel surface: Thermoplastic plastic (PA6)
Wheel Center: Thermoplastic plastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 137 x 105mm **Bolt Hole Spacing** 92.5 x 84.5mm Plate Hole 15 x 11mm 55mm Offset 260mm **Swivel Interference** Overall Height 190mm **Swivel Radius** 130mm Hardness Of Tread 75±5° Shore D Load Capacity (Dynamic) 300kgs

Load Capacity (Dynamic) 300kgs

Load Capacity (Static) 450kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster
Stainless N/A
Electrical Conductivity N/A

Anti-Static N/A
Weight 2.00kgs
Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

#### **Dimensions**

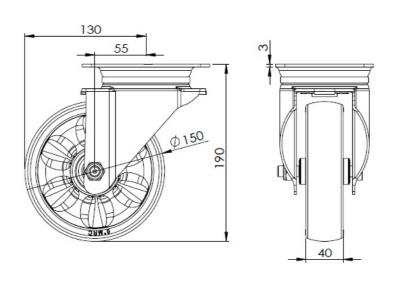

## Mounting

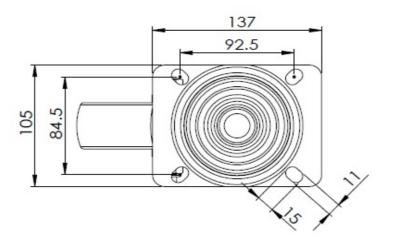

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.