1153-1 Heavy Duty 2" Wide General Purposes Caster (European Style) Series

Dersheng Casters Keep Rolling

W Resolute Wheel Diameter × Wheel Width 152 x 50mm

EAN


TW-4115306002056

Swivel Caster with Riveted Fork and Stamping Fork.
Zine-Plated, Mounting Type - Top Plate.
Reinforced, impact-resistant polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.
Dark gray, Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 152mm
Wheel Width 50mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 137 x 105mm **Bolt Hole Spacing** 92.5 x 84.5mm Plate Hole 15 x 11mm Offset 55mm 262mm **Swivel Interference** Overall Height 191mm **Swivel Radius** 131mm Hardness Of Tread 72±5° Shore A Load Capacity (Dynamic) 272kgs

Load Capacity (Dynamic) 272kgs

Load Capacity (Static) 408kgs

Temperature -20°C to +60°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.00kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

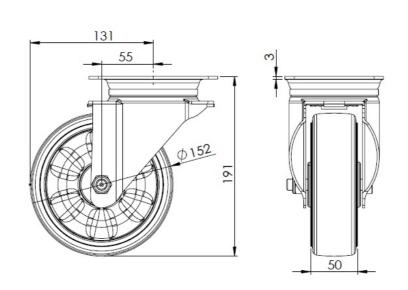

Mounting

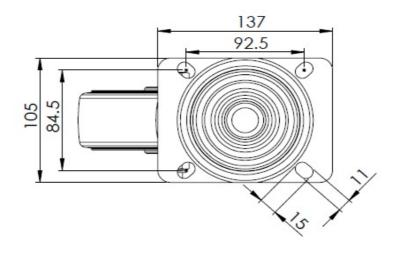

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.