1153-1 Heavy Duty 2" Wide General Purposes Caster (European Style) Series



NBR Wheel Diameter × Wheel Width 150 x 40 mm


EAN

TW-4115306002062

Swivel Caster with Riveted Fork and Stamping Fork.
Zine-Plated, Mounting Type - Top Plate.
Cast Iron core with High-Quality Resilient Rubber Wheel Tread.
Bearings—Ball Bearings.

Wheel surface: high-quality elastic rubber Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 137 x 105mm **Bolt Hole Spacing** 105 x 77.5mm Plate Hole 13.5 x 11mm 55mm Offset 260mm Swivel Interference Overall Height 190mm **Swivel Radius** 130mm Hardness Of Tread 85±5° Shore A

Load Capacity (Dynamic) 150kgs
Load Capacity (Static) 225kgs

Temperature -20°C to +80°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.00kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

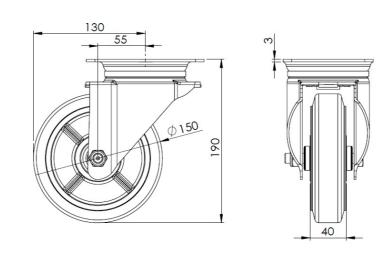

Mounting

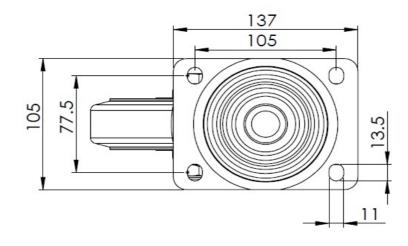

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.