

1153 Heavy Duty 2" Wide General Purposes Caster Series

Rubber Wheel Diameter × Wheel Width 150 x 40mm

EAN


TW-4115306004023

Casters with a front brake and With locking system. Top Plate Riveted and Stamping Fork. Zine-Plated, Mounting Type - Top Plate, large Iron Plain Bearing cover. High-Quality Impact-Resistant Polypropylene Wheel Center with High-Quality Resilient Rubber Wheel Tread. Black, Plain Bearing.

Wheel surface: high-quality elastic rubber

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

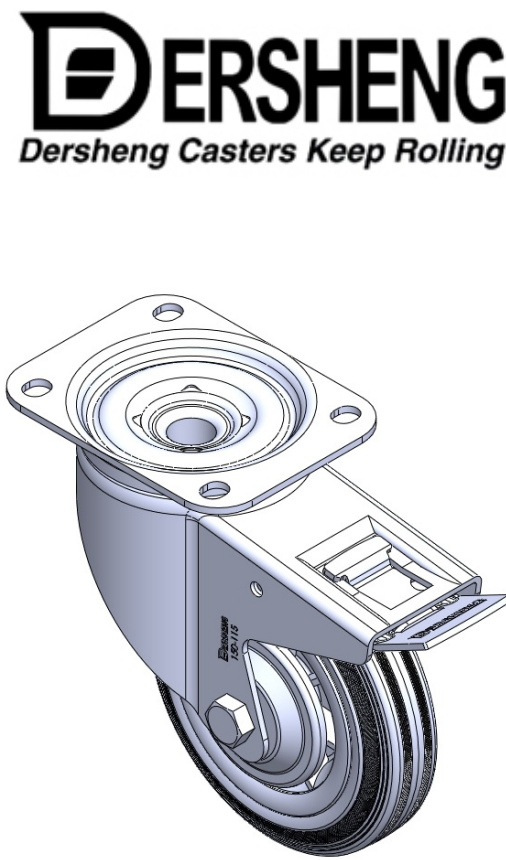

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	150mm
Wheel Width	40mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	137 x 105mm
Bolt Hole Spacing	105 x 77.5mm
Plate Hole	13.5 x 11mm
Offset	60mm
Swivel Interference	330mm
Overall Height	190mm
Swivel Radius	165mm
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	125kgs
Load Capacity (Static)	187.5kgs
Temperature	-20°C to +120°C
Fork Type	Swivel Caster With Front Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.30kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

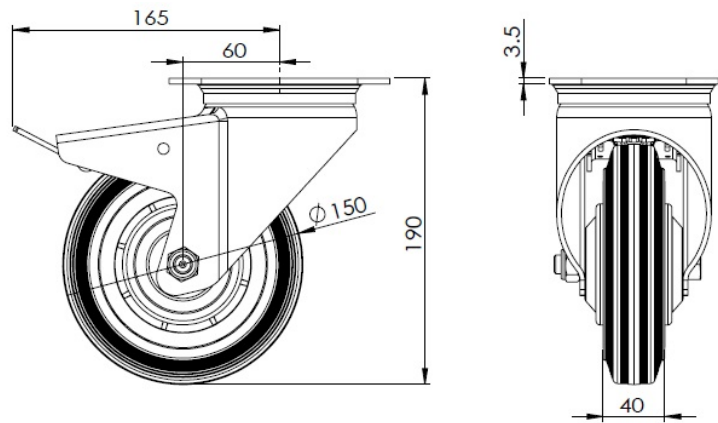

Mounting

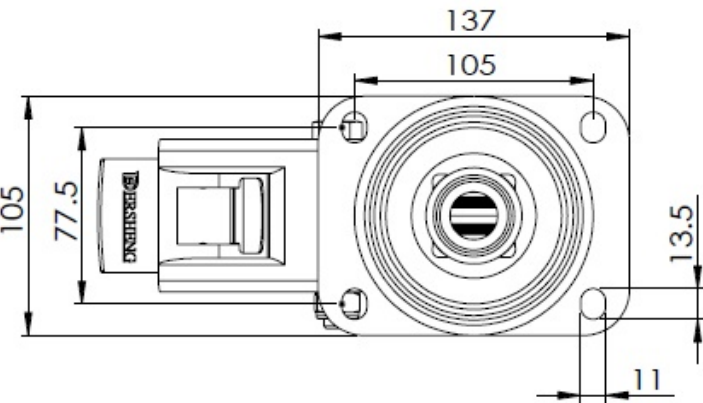

* For any deviation between metric and imperial spec, please refer to the metric spec.