

1153 Heavy Duty 2" Wide General Purposes Caster Series




Rubber Wheel Diameter × Wheel Width 150 x 40mm

EAN
TW-4115306004023

Casters with a front brake and With locking system. Top Plate Riveted and Stamping Fork. Zine-Plated, Mounting Type - Top Plate, large Iron Plain Bearing cover. High-Quality Impact-Resistant Polypropylene Wheel Center with High-Quality Resilient Rubber Wheel Tread. Black, Plain Bearing.

Wheel surface: high-quality elastic rubber
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

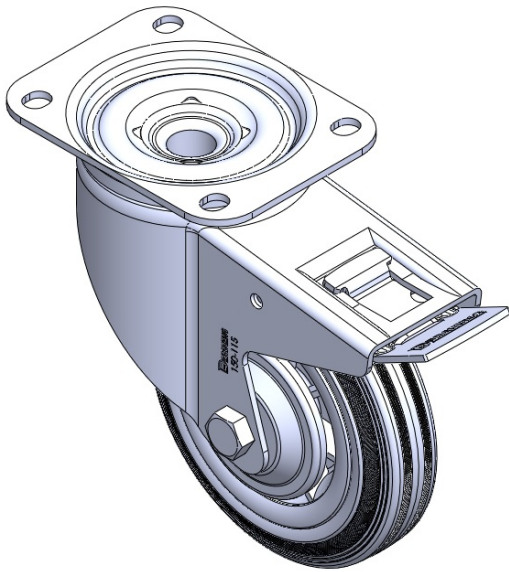

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	6 "
Wheel Width	1-5/8 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	5-1/2 " x 4-3/16 "
Bolt Hole Spacing	4-1/8 " x 3-1/16 "
Plate Hole	9/16 " x 3/8 "
Offset	2-7/16 "
Swivel Interference	13 "
Overall Height	7-1/2 "
Swivel Radius	6-1/2 "
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	276lbs
Load Capacity (Static)	413lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster With Front Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	5.1lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

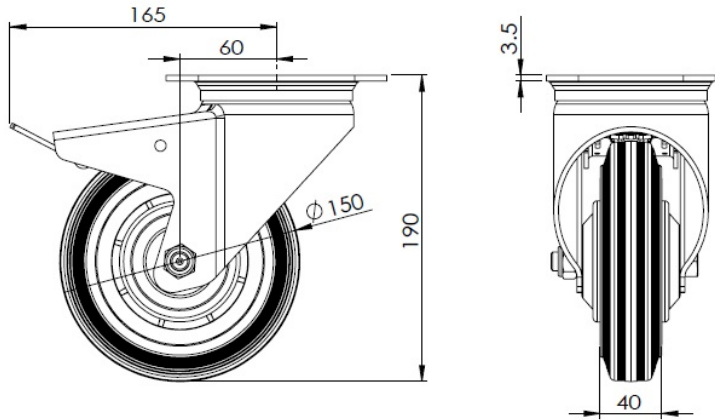

Mounting

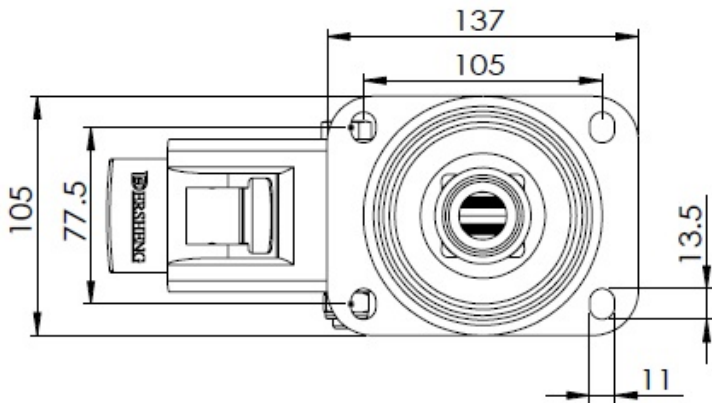

* For any deviation between metric and imperial spec, please refer to the metric spec.