

1153 Heavy Duty 2" Wide General Purposes Caster Series

WMRC Wheel Diameter × Wheel Width 150 x 40mm

EAN


TW-4115306004060

Casters with front brake and With locking system. Top Plate Riveted and Stamping. Zine-Plated, Mounting Type - Top Plate. Reinforced thermoplastic plastic Wheel Center and Wheel Tread. Bearings—Ball Bearings.

Wheel surface: Thermoplastic plastic (PA6)

Wheel Center: Thermoplastic plastic (PA6)

Drawings are for reference only and may differ from the product

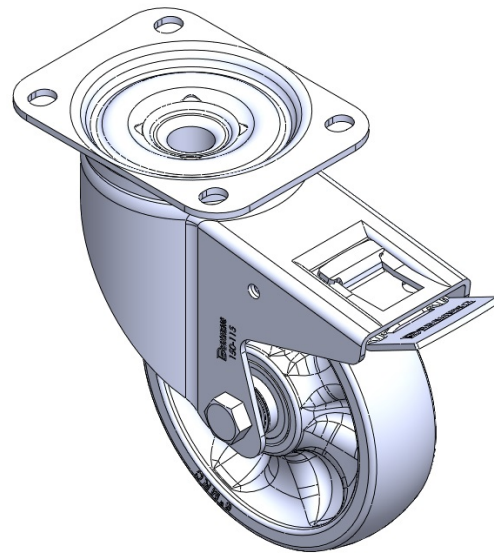

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	150mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	137 x 105mm
Bolt Hole Spacing	105 x 77.5mm
Plate Hole	13.5 x 11mm
Offset	60mm
Swivel Interference	330mm
Overall Height	190mm
Swivel Radius	165mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	300kgs
Load Capacity (Static)	450kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Front Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.30kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

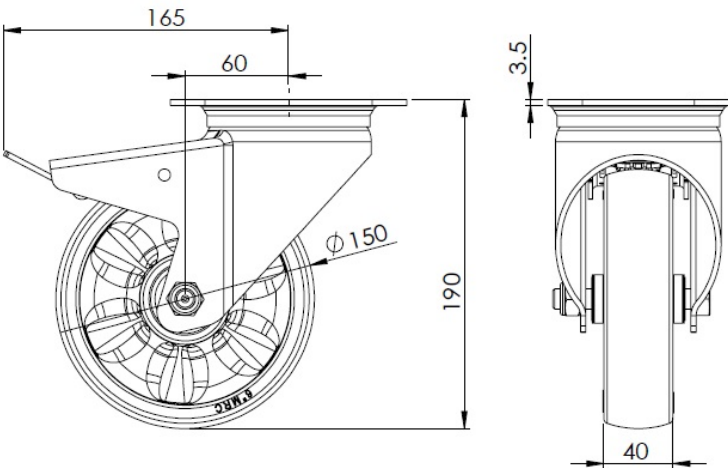

Mounting

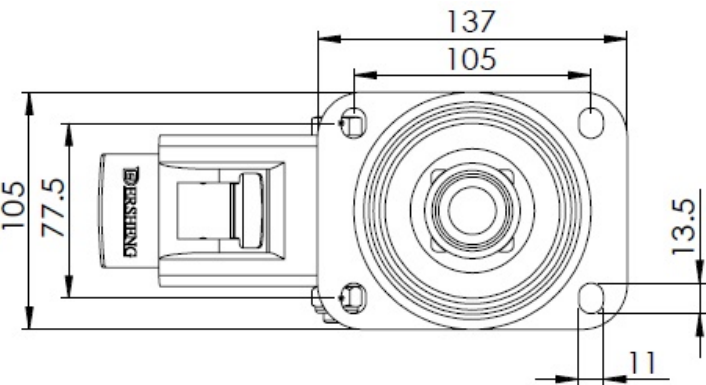

* For any deviation between metric and imperial spec, please refer to the metric spec.