1153 Heavy Duty 2" Wide General Purposes Caster Series



WMRC Wheel Diameter × Wheel Width 150 x 40mm


EAN

TW-4115306004064

Casters with front brake and With locking system. Top Plate Riveted and Stamping. Zine-Plated, Mounting Type - Top Plate with Large Cover. Reinforced thermoplastic plastic Wheel Center and Wheel Tread. Bearings—Ball Bearings.

Wheel surface: Thermoplastic plastic (PA6)
Wheel Center: Thermoplastic plastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 137 x 105mm **Bolt Hole Spacing** 105 x 77.5mm Plate Hole 13.5 x 11mm 60mm Offset 330mm Swivel Interference Overall Height 190mm **Swivel Radius** 165mm Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 300kgs
Load Capacity (Static) 450kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.30kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

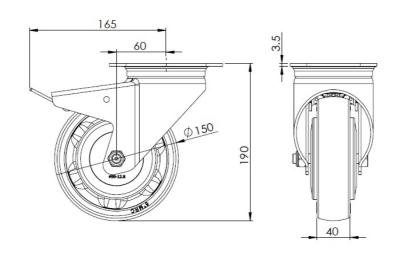

Mounting

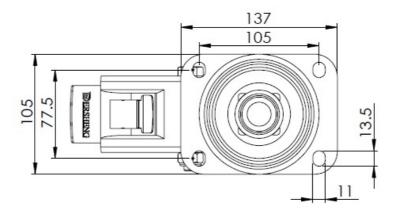

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.